



佛山市凡顺科技有限公司
FOSHAN FILTA TECHNOLOGY CO., LTD

营销中心：佛山市南海区桂澜北路26号招商置地中心3座1714-1715
Office: Room 1714-1715, Zhaoshangzhidi Center, 26# Guilan North Rd., Nanhai, Foshan,
Guangdong, China

生产基地：佛山市顺德区七滘工业区
Factory: Qijiao Industry Zone, Shunde, Foshan, China.

E-mail: Dan@wzhardware.cn
Wechat/whatsapp: 17357712636
MOB: 17357712636
TEL: 0086-757-86325050

温州钎钛五金有限公司
WENZHOU FILTA HARDWARE CO., LTD

营销中心：温州市市府路新益大厦18楼
Marketing Center: 18th Floor, Building #1, Xinyi Mansion, Shifu Road, Wenzhou, China

生产基地：温州市鹿城轻工业园盛发路
Factory Add: Shengfa Road, Light Industrial Zone, Tengqiao, Wenzhou, China.

温州市滨海新区万洋国际工业城
Wanyang International Industrial Zone, Binhai New District, Wenzhou, China.

联系电话：0577-88857081
全国服务热线：400-800-3145

E-mail: tony@wzhardware.cn
Wechat: tony-filta
Post Code: 325000 Http://www.filta.cn
TEL: 0086-577-88800729
FAX: 0086-577-88150765



www.filta-china.com



www.filta.cn



2019 FURNITURE HARDWARE



About us +

2009年凡态在中国扎根，并以振兴中国智造，打造国际化民族品牌为己任。

为了让中国品牌走向世界，FILTA于2014年在欧洲成立了销售研发中心“ASTREE-FILTA”。凡态秉持着民族的就是世界的理念，每一件产品，都由国内设计师和欧洲设计师联手打造。将我们民族的文化注入于产品之中，把科技带入我们的家居生活中。

在这物联网、人工智能、互联工厂的新时代。凡态整合现有的研发、设计、采购、生产以及营销等各个环节形成网络化的平台，最大限度地打破信息壁垒，进而实现对客户需求的即时响应，为客户提供多元化的智品和优品，更是能为广大客户和经销商提供完整的五金配套方案！现凡态旗下拥有的凡态智品和凡态优品两大系列产品，更是远销国外。其中包括有：智能锁、拉手、门锁、铰链合页等。

“小细节，大不同”的追求，深深的刻在每一个凡态人的心中。所以对每一件产品的设计和生产都是经过严格的工序控制。凡态人追求做到每一个细节都一丝不苟。另外凡态完善的营销体系和经验丰富的生产制造团队，也是力求每一个服务细节都能得到客户的肯定和满意！

Wenzhou Filta Hardware Co.,Ltd. is a manufacturer of building hardware for the furniture, kitchen, and wood industry. Our product program has more than 1,000 different article numbers among the furniture handles, door handles, door stoppers, glass holders, bolts, clothes hooks and many more.

We are inspired of the International players in the business and with our good net work and great knowledge to the business we assure our customers the most attractive products with many accessories.

Our product program is always up-to-date and we make big efforts to deliver at the right time and right quality. This we think is very important for a good co-operation. We are looking forward to receive valuable comments from the customers all over world.





生产流程

Furniture hardware Innovative



Factory/工厂



Tooling/模具车间



Slide machine room/滑轨车间



Semi-manufacturs/半成品



Finished products/成品



Testing equipment/检测设备



Testing equipment/检测设备



Warehouse/仓库



Exhibition/展会

企业形象&荣誉

Company image & honor





FT-9701 一段力/二段力固装/自卸缓冲铰链

FT-9701 One Way/two Way Fixed/clip On Soft Close Hinge

Product Description 产品描述




- * 开启角度: 105度
* Opening degree: 105°
- * 铰杯厚度: 11.5毫米
* Depth of cup: 11.5mm
- * 铰杯直径: 35毫米
* Cup diameter: 35mm
- * 面板(K)尺寸: 3-7毫米
* Drilling distance on door(K): 3-7mm
- * 门可选用板厚度: 14-22毫米
* Range of door thickness: 14-22mm



Design 设计

开门所需间隙

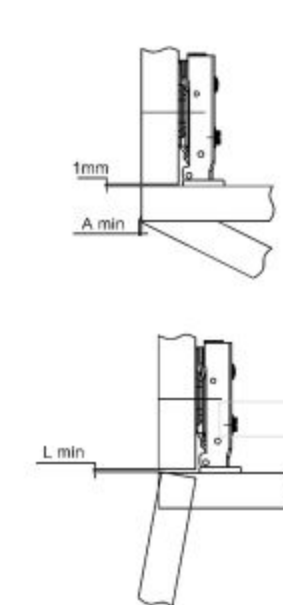


K=门板钻孔到门板边沿距离		T=门板厚度				A=门板与柜侧的距离			L=门板与侧板的距离	
	T=	14	15	16	17	18	19	20	21	22
K=3	A=	0.3	0.5	0.7	0.9	1.2	1.5	1.8	2.2	2.6
K=4	A=	0.3	0.5	0.7	0.9	1.1	1.4	1.8	2.1	2.5
K=5	A=	0.2	0.4	0.6	0.9	1.1	1.4	1.7	2.0	2.4
K=6	A=	0.2	0.4	0.6	0.8	1.1	1.3	1.6	2.0	2.4
K=7	A=	0.2	0.4	0.5	0.8	1.0	1.3	1.6	1.9	2.3

T=		14	15	16	17	18	19	20	21	22
K=3	L=	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
K=4	L=	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2
K=5	L=	0.0	0.0	0.0	0.0	0.0	0.3	0.5	0.8	1.0
K=6	L=	0.0	0.3	0.5	0.8	1.0	1.3	1.5	1.8	2.0
K=7	L=	1.0	1.3	1.5	1.7	2.0	2.2	2.5	2.7	2.9

上面的参数基于门板边沿为直角边;如果门板边沿为圆角边,上述参数将相应减少。

铰杯安装孔位图 Cup drilling distance and depth

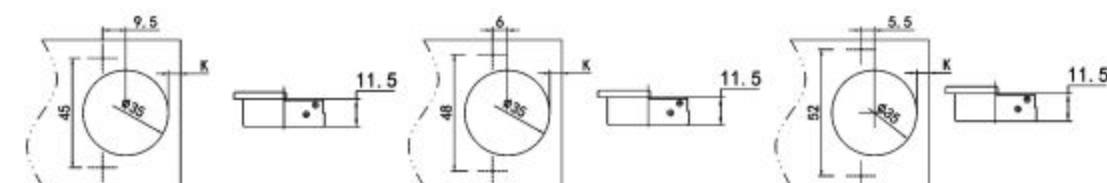


Installation Dimension Drawing 订购信息

Model: FT-9701F

直臂Full Overlay



H=14+K-D




Model: FT-9701H

中曲Half Overlay



H=4+K-D




Model: FT-9701I

大曲Insert



H=A+K-4



H=底座高度Height of mounting plate

D=侧板上所需盖位Distance by which the door over the side board.

K=门板外缘与铰杯钻孔距离Distance between edge of door and edge of cup hole

A=门与侧板间隙Reveal between door and side board

D overlay, A reveal calculation table D盖位, A间隙位计算值表

		H=14+K-D				
D	K	3	4	5	6	7
0		17	18	19	20	21
2		15	16	17	18	19
4		13	14	15	16	17

		H=4+K-D				
D	K	3	4	5	6	7
0		7	8	9	10	11
2		5	6	7	8	9
4		3	4	5	6	7

		H=A+K-4				
A	K	3	4	5	6	7
0		1	0	-1	-2	-3
2		3	2	1	0	-1
4		5	4	3	2	1

FT-9702 不锈钢201固装/自卸铰链

FT-9702 Stainless Steel 201 Fixed/clip On Hinge

Product Description 产品描述




- * 开启角度: 105度
* Opening degree: 105°
- * 铰杯厚度: 11.5毫米
* Depth of cup: 11.5mm
- * 铰杯直径: 35毫米
* Cup diameter: 35mm
- * 面板(K)尺寸: 3-7毫米
* Drilling distance on door(K): 3-7mm
- * 门可选用板厚度: 14-22毫米
* Range of door thickness: 14-22mm



Design 设计


开门所需间隙



K=门板钻孔到门板边沿距离			T=门板厚度			A=门板与柜侧的距离			L=门板与侧板的距离		
	T=	14	15	16	17	18	19	20	21	22	
K=3	A=	0.3	0.5	0.7	0.9	1.2	1.5	1.8	2.2	2.6	
K=4	A=	0.3	0.5	0.7	0.9	1.1	1.4	1.8	2.1	2.5	
K=5	A=	0.2	0.4	0.6	0.9	1.1	1.4	1.7	2.0	2.4	
K=6	A=	0.2	0.4	0.6	0.8	1.1	1.3	1.6	2.0	2.4	
K=7	A=	0.2	0.4	0.5	0.8	1.0	1.3	1.6	1.9	2.3	

门板与侧板闭合间隙=1mm


门板与侧板闭合间隙=1mm



	T=	14	15	16	17	18	19	20	21	22
K=3	L=	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
K=4	L=	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2
K=5	L=	0.0	0.0	0.0	0.0	0.0	0.3	0.5	0.8	1.0
K=6	L=	0.0	0.3	0.5	0.8	1.0	1.3	1.5	1.8	2.0
K=7	L=	1.0	1.3	1.5	1.7	2.0	2.2	2.5	2.7	2.9

上面的参数基于门板边沿为直角边;如果门板边沿为圆角边,上述参数将相应减少。

铰杯安装孔位图 Cup drilling distance and depth

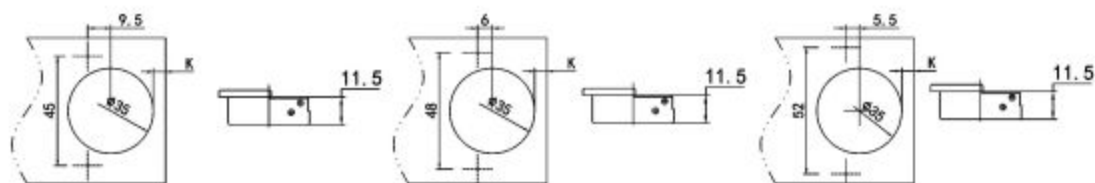


Installation Dimension Drawing 订购信息

Model: FT-9702F

直臂Full Overlay



H=14+K-D




Model: FT-9702H

中曲Half Overlay



H=4+K-D

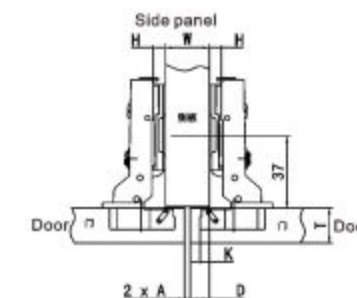


Model: FT-9702I

大曲Insert



H=A+K-4



H=底座高度Height of mounting plate

D=侧板上所需盖位Distance by which the door over the side board.

K=门板外线与铰杯钻孔距离Distance between edge of door and edge of cup hole

A=门与侧板间隙Reveal between door and side board

D overlay, A reveal calculation table D盖位, A间隙位计算值表

		H=14+K-D					
D	K	3	4	5	6	7	
0		17	18	19	20	21	

		H=4+K-D					
D	K	3	4	5	6	7	
0		7	8	9	10	11	

		H=K+A-4					
A	K	3	4	5	6	7	
0		1	0	-1	-2	-3	

FT-9703不锈钢304一段力铰链固装/自卸

FT-9703 Stainless Steel 304 One Way Hinge Fixed/clip On Hinge

Product Description 产品描述




- * 开启角度: 105度
* Opening degree: 105°
- * 铰杯厚度: 11.5毫米
* Depth of cup: 11.5mm
- * 铰杯直径: 35毫米
* Cup diameter: 35mm
- * 面板(K)尺寸: 3-7毫米
* Drilling distance on door(K): 3-7mm
- * 门可选用板厚度: 12-20毫米
* Range of door thickness: 12-20mm



Design 设计


开门所需间隙



K=门板钻孔到门板边沿距离			T=门板厚度			A=门板与柜侧的距离			L=门板与侧板的距离		
	T=	14	15	16	17	18	19	20	21	22	
K=3	A=	0.3	0.5	0.7	0.9	1.2	1.5	1.8	2.2	2.6	
K=4	A=	0.3	0.5	0.7	0.9	1.1	1.4	1.8	2.1	2.5	
K=5	A=	0.2	0.4	0.6	0.9	1.1	1.4	1.7	2.0	2.4	
K=6	A=	0.2	0.4	0.6	0.8	1.1	1.3	1.6	2.0	2.4	
K=7	A=	0.2	0.4	0.5	0.8	1.0	1.3	1.6	1.9	2.3	

门板与侧板闭合间隙=1mm


门板与侧板闭合间隙=1mm



T=		14	15	16	17	18	19	20	21	22
K=3	L=	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
K=4	L=	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2
K=5	L=	0.0	0.0	0.0	0.0	0.0	0.3	0.5	0.8	1.0
K=6	L=	0.0	0.3	0.5	0.8	1.0	1.3	1.5	1.8	2.0
K=7	L=	1.0	1.3	1.5	1.7	2.0	2.2	2.5	2.7	2.9

上面的参数基于门板边沿为直角边;如果门板边沿为圆角边,上述参数将相应减少。

铰杯安装孔位图 Cup drilling distance and depth

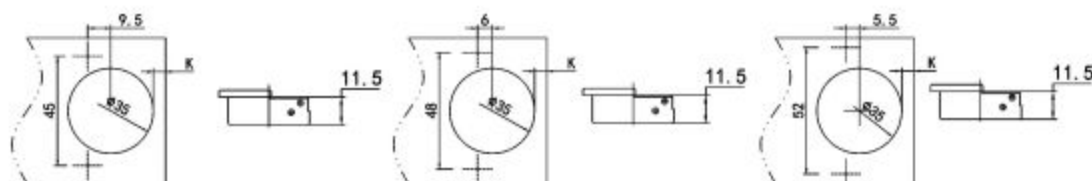


Installation Dimension Drawing 订购信息

Model: FT-9703F

直臂Full Overlay



H=14+K-D




Model: FT-9703H

中曲Half Overlay



H=4+K-D

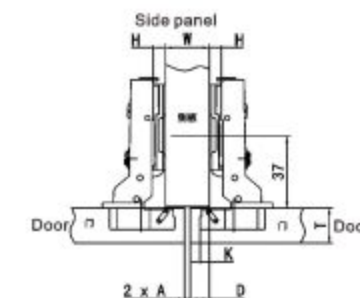


Model: FT-9703I

大曲Insert



H=A+K-4



H=底座高度Height of mounting plate

D=侧板上所需盖位Distance by which the door over the side board.

K=门板外缘与铰杯钻孔距离Distance between edge of door and edge of cup hole

A=门与侧板间隙Reveal between door and side board





D overlay, A reveal calculation table D盖位, A间隙位计算值表

		H=14+K-D							
		H=14+K-D							
		3	4	5	6	7			
D	K	3	4	5	6	7			
0		17	18	19	20	21			

		H=4+K-D							
		H=4+K-D							
		3	4	5	6	7			
D	K	3	4	5	6	7			
0		7	8	9	10	11			

		H=K+A-4							
		H=K+A-4							
		3	4	5	6	7			
A	K	3	4	5	6	7			
0		1	0	-1	-2	-3			

Ø35铰杯可配螺丝/胶粒种类 dowels and screws for 35mm cup accessories



FT-9704 一段力自卸液压缓冲铰链

FT-9704 one way clip on hydraulic buffer hinge

Product Description 产品描述




- * 开启角度: 105度
* Opening degree: 105°
- * 铰杯厚度: 11.5毫米
* Depth of cup: 11.5mm
- * 铰杯直径: 35毫米
* Cup diameter: 35mm
- * 面板(K)尺寸: 3-7毫米
* Drilling distance on door(K): 3-7mm
- * 门可选用板厚度: 14-22毫米
* Range of door thickness: 14-22mm




Design 设计

开门所需间隙



K=门板钻孔到门板边沿距离 T=门板厚度 A=门板与柜侧的距离 L=门板与侧板的距离


T=	14	15	16	17	18	19	20	21	22
K=3 A=	0.3	0.5	0.7	0.9	1.2	1.5	1.8	2.2	2.6
K=4 A=	0.3	0.5	0.7	0.9	1.1	1.4	1.8	2.1	2.5
K=5 A=	0.2	0.4	0.6	0.9	1.1	1.4	1.7	2.0	2.4
K=6 A=	0.2	0.4	0.6	0.8	1.1	1.3	1.6	2.0	2.4
K=7 A=	0.2	0.4	0.5	0.8	1.0	1.3	1.6	1.9	2.3



T=	14	15	16	17	18	19	20	21	22
K=3 L=	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
K=4 L=	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2
K=5 L=	0.0	0.0	0.0	0.0	0.0	0.3	0.5	0.8	1.0
K=6 L=	0.0	0.3	0.5	0.8	1.0	1.3	1.5	1.8	2.0
K=7 L=	1.0	1.3	1.5	1.7	2.0	2.2	2.5	2.7	2.9

上面的参数基于门板边沿为直角边;如果门板边沿为圆角边,上述参数将相应减少。

铰杯安装孔位图 Cup drilling distance and depth

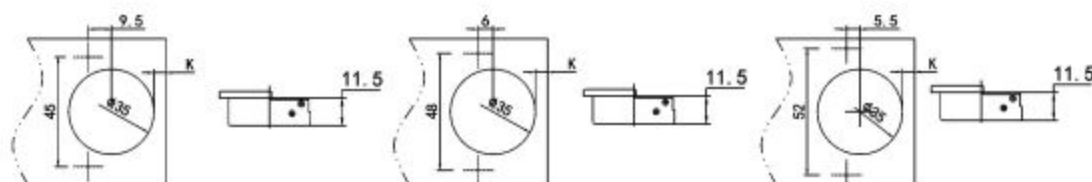


Installation Dimension Drawing 订购信息

Model: FT-9704F

直臂 Full Overlay



H=14+K-D




Model: FT-9704H

中曲 Half Overlay



H=4+K-D




Model: FT-9704I

大曲 Insert



H=A+K-4

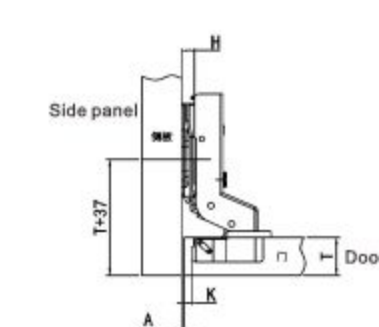

H=底座高度 Height of mounting plate

D=侧板上所需盖位 Distance by which the door over the side board.

K=门板外缘与铰杯钻孔距离 Distance between edge of door and edge of cup hole

A=门与侧板间隙 Reveal between door and side board






D overlay, A reveal calculation table D盖位, A间隙位计算值表

H=14+K-D					
D \ K	3	4	5	6	7
0	17	18	19	20	21
2	15	16	17	18	19
4	13	14	15	16	17

H=4+K-D					
D \ K	3	4	5	6	7
0	7	8	9	10	11
2	5	6	7	8	9
4	3	4	5	6	7

H=K+A-4					
A \ K	3	4	5	6	7
0	1	0	-1	-2	-3
2	3	2	1	0	-1
4	5	4	3	2	1

Ø35铰杯可配螺丝/胶粒种类 dowels and screws for 35mm cup accessories




FT-9705 二段力卡式翻盖铰链(快装、3D可调)

FT-9705 two Way clamshell hinge with power card (quick assembly, 3D adjustable)

Product Description 产品描述




- * 开启角度: 105度
* Opening degree: 105°
- * 铰杯厚度: 11.5毫米
* Depth of cup: 11.5mm
- * 铰杯直径: 35毫米
* Cup diameter: 35mm
- * 面板(K)尺寸: 3-7毫米
* Drilling distance on door(K): 3-7mm
- * 门可选用板厚度: 14-22毫米
* Range of door thickness: 14-22mm

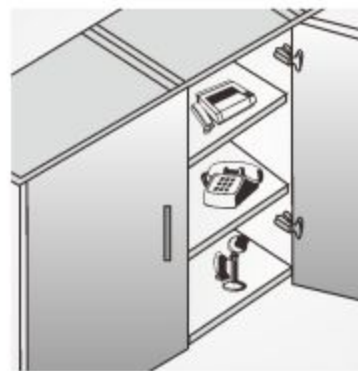


Design 设计

开门所需间隙



K=门板钻孔到门板边沿距离 T=门板厚度 A=门板与柜侧的距离 L=门板与侧板的距离


		T=	14	15	16	17	18	19	20	21	22
K=3	A=	0.3	0.5	0.7	0.9	1.2	1.5	1.8	2.2	2.6	
K=4	A=	0.3	0.5	0.7	0.9	1.1	1.4	1.8	2.1	2.5	
K=5	A=	0.2	0.4	0.6	0.9	1.1	1.4	1.7	2.0	2.4	
K=6	A=	0.2	0.4	0.6	0.8	1.1	1.3	1.6	2.0	2.4	
K=7	A=	0.2	0.4	0.5	0.8	1.0	1.3	1.6	1.9	2.3	



		T=	14	15	16	17	18	19	20	21	22
K=3	L=	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
K=4	L=	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.2
K=5	L=	0.0	0.0	0.0	0.0	0.0	0.3	0.5	0.8	1.0	
K=6	L=	0.0	0.3	0.5	0.8	1.0	1.3	1.5	1.8	2.0	
K=7	L=	1.0	1.3	1.5	1.7	2.0	2.2	2.5	2.7	2.9	

上面的参数基于门板边沿为直角边;如果门板边沿为圆角边,上述参数将相应减少。

铰杯安装孔位图 Cup drilling distance and depth

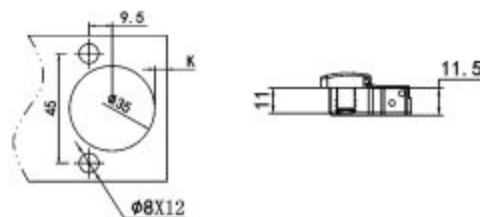


Installation Dimension Drawing 订购信息

Model: FT-9705F

直臂Full Overlay



H=14+K-D




Model: FT-9705H

中曲Half Overlay



H=4+K-D

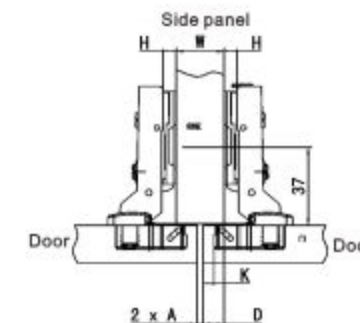


Model: FT-9705I

大曲Insert



H=A+K-4



H=底座高度Height of mounting plate

D=侧板上所需盖位Distance by which the door over the side board.

K=门板外缘与铰杯钻孔距离Distance between edge of door and edge of cup hole

A=门与侧板间隙Reveal between door and side board


D overlay, A reveal calculation table D盖位, A间隙位计算值表

		H=14+K-D									
D	K	3	4	5	6	7					
0		17	18	19	20	21					
2		15	16	17	18	19					
4		13	14	15	16	17					

		H=4+K-D									
D	K	3	4	5	6	7					
0		7	8	9	10	11					
2		5	6	7	8	9					
4		3	4	5	6	7					

		H=K+A-4									
A	K	3	4	5	6	7					
0		1	0	-1	-2	-3					
2		3	2	1	0	-1					
4		5	4	3	2	1					

Ø35铰杯可配螺丝/胶粒种类 dowels and screws for 35mm cup accessories

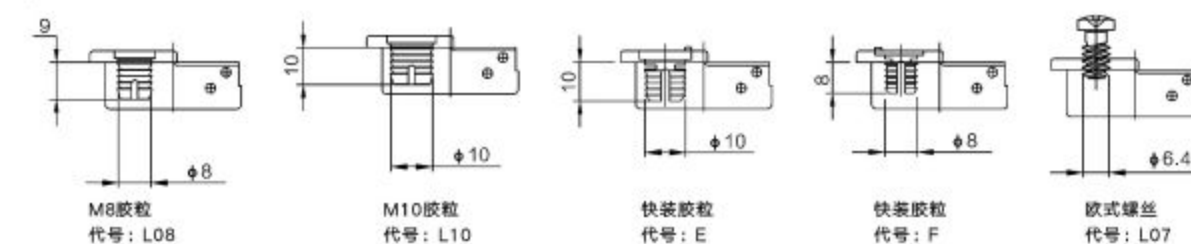


FT-9706 三维调节自卸定位缓冲铰链

FT-9706 3D adjustable clip on soft close hinge with hooks

Product Description 产品描述




- * 开启角度: 105度
* Opening degree: 105°
- * 铰杯厚度: 11.5毫米
* Depth of cup: 11.5mm
- * 铰杯直径: 35毫米
* Cup diameter: 35mm
- * 面板(K)尺寸: 3-7毫米
* Drilling distance on door(K): 3-7mm
- * 门可选用板厚度: 14-22毫米
* Range of door thickness: 14-22mm

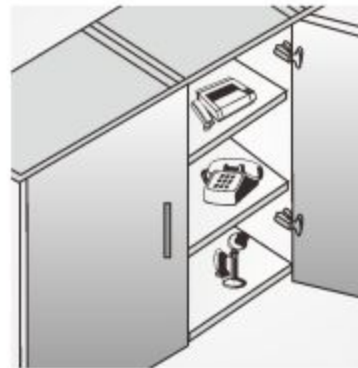

Installation Dimension Drawing 订购信息


Model: FT-9706F

直臂Full Overlay
H=14+K-D




Model: FT-9706H

中曲Half Overlay
H=4+K-D



Model: FT-9706I


大曲Insert
H=A+K-4



D overlay, A reveal calculation table D盖位, A间隙位计算值表

H=14+K-D						H=4+K-D						H=K+A-4					
D	H	K	3	4	5	6	7	D	H	K	3	4	5	6	7	A	K
0	17	18	19	20	21			0	7	8	9	10	11			0	1
2	15	16	17	18	19			2	5	6	7	8	9			2	3
4	13	14	15	16	17			4	3	4	5	6	7			4	5

Ø35铰杯可配螺丝/胶粒种类 dowels and screws for 35mm cup accessories

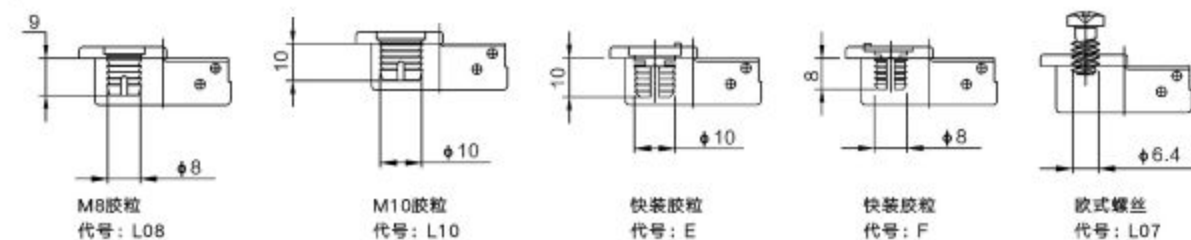


FT-9710 二段力滑入式铰链

FT-9710 Two way slide on hinge

Product Description 产品描述




- * 开启角度: 105度
* Opening degree: 105°
- * 铰杯厚度: 11.5毫米
* Depth of cup: 11.5mm
- * 铰杯直径: 35毫米
* Cup diameter: 35mm
- * 面板(K)尺寸: 3-7毫米
* Drilling distance on door(K): 3-7mm
- * 门可选用板厚度: 14-22毫米
* Range of door thickness: 14-22mm

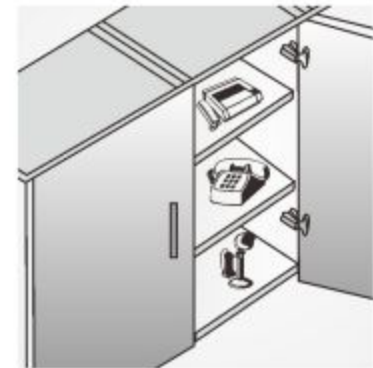

Installation Dimension Drawing 订购信息


Model: FT-9710F

直臂Full Overlay
H=14+K-D




Model: FT-9710H

中曲Half Overlay
H=4+K-D



Model: FT-9710I

大曲Insert
H=A+K-4



D overlay, A reveal calculation table D盖位, A间隙位计算值表

H=14+K-D						H=4+K-D						H=K+A-4					
D	H	K	3	4	5	6	7	D	H	K	3	4	5	6	7	A	K
0	17	18	19	20	21			0	7	8	9	10	11			0	1
2	15	16	17	18	19			2	5	6	7	8	9			2	3
4	13	14	15	16	17			4	3	4	5	6	7			4	5

FT-9711 固装/自卸缓冲铰链

FT-9711 Fixed/clip On Soft Close Hinge

Product Description 产品描述




- * 开启角度: 105度
* Opening degree: 105°
- * 铰杯厚度: 11.5毫米
* Depth of cup: 11.5mm
- * 铰杯直径: 35毫米
* Cup diameter: 35mm
- * 面板(K)尺寸: 3-7毫米
* Drilling distance on door(K): 3-7mm
- * 门可选用板厚度: 14-22毫米
* Range of door thickness: 14-22mm




Installation Dimension Drawing 订购信息


Model: FT-9711F
直臂Full Overlay
 $H=14+K-D$



Model: FT-9711H
中曲Half Overlay
 $H=4+K-D$



Model: FT-9711I
大曲Insert
 $H=A+K-4$



D overlay, A reveal calculation table D盖位, A间隙位计算值表

H=14+K-D						H=4+K-D						H=K+A-4					
D	H	K	3	4	5	6	7	D	H	K	3	4	5	6	7	A	K
0	17	18	19	20	21			0	7	8	9	10	11			0	1
2	15	16	17	18	19			2	5	6	7	8	9			2	3
4	13	14	15	16	17			4	3	4	5	6	7			4	5

FT-9712 (9717) 三维偏心调节自卸缓冲铰链

FT-9712(9717) 3D Eccentric Adjustable Clip On Soft Close Hinge

Product Description 产品描述




- * 开启角度: 105度
* Opening degree: 105°
- * 铰杯厚度: 11.5毫米
* Depth of cup: 11.5mm
- * 铰杯直径: 35毫米
* Cup diameter: 35mm
- * 面板(K)尺寸: 3-7毫米
* Drilling distance on door(K): 3-7mm
- * 门可选用板厚度: 14-22毫米
* Range of door thickness: 14-22mm




Installation Dimension Drawing 订购信息


Model: FT-9712F
FT-9717F
直臂Full Overlay
 $H=14+K-D$



Model: FT-9712H
FT-9717H
中曲Half Overlay
 $H=4+K-D$




Model: FT-9712I
FT-9717I
大曲Insert
 $H=A+K-4$



D overlay, A reveal calculation table D盖位, A间隙位计算值表

H=14+K-D						H=4+K-D						H=K+A-4					
D	H	K	3	4	5	6	7	D	H	K	3	4	5	6	7	A	K
0	17	18	19	20	21			0	7	8	9	10	11			0	1
2	15	16	17	18	19			2	5	6	7	8	9			2	3
4	13	14	15	16	17			4	3	4	5	6	7			4	5

Ø35铰杯可配螺丝/胶粒种类 dowels and screws for 35mm cup accessories

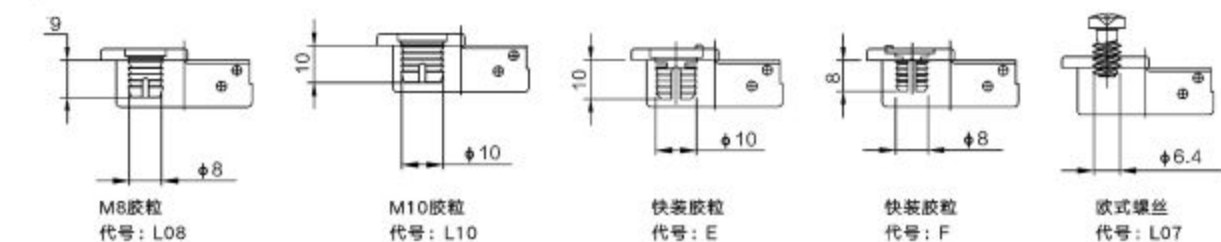


FT-9713 135°卡式铰链
FT-9713 135° Cassette Hinge

Product Description 产品描述




- * 开启角度: 135度
* Opening degree: 135°
- * 铰杯厚度: 11.5毫米
* Depth of cup: 11.5mm
- * 铰杯直径: 35毫米
* Cup diameter: 35mm
- * 面板(K)尺寸: 3-7毫米
* Drilling distance on door(K): 3-7mm
- * 门可选用板厚度: 14-22毫米
* Range of door thickness: 14-22mm

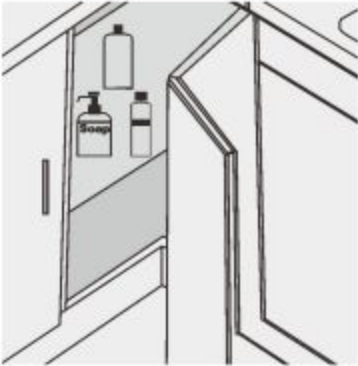


Design 设计

角柜门组合应用实例
Hinge application to blind corner cabinet example

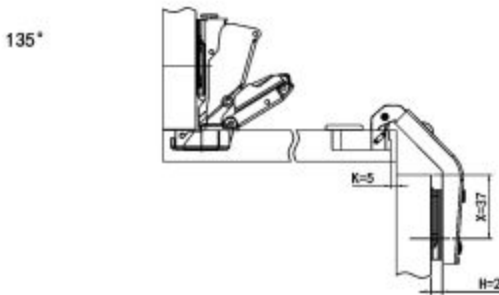


铰杯安装孔位图 Cup drilling distance and depth

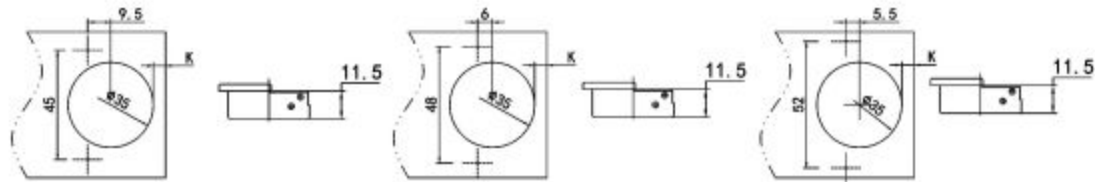

Installation Dimension Drawing 订购信息

Model: FT-9713

直臂 Full Overlay

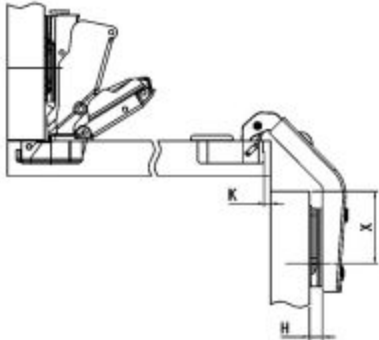


H=底座高度 Height of mounting plate
D=侧板上所需盖位 Distance by which the door over the side board.
K=门板外缘与铰杯钻孔距离 Distance between edge of door and edge of cup hole
A=门与侧板间隙 Reveal between door and side board

D overlay, A reveal calculation table D盖位, A间隙位计算值表

H=14+K-D							H=4+K-D							H=K+A-4									
D	H	K	3	4	5	6	7	D	H	K	3	4	5	6	7	A	H	K	3	4	5	6	7
0	0	0						0	0	0						0	0	0					
2	2	2						2	2	2						2	2	2					
4	4	4						4	4	4						4	4	4					

Ø35铰杯可配螺丝/胶粒种类 dowels and screws for 35mm cup accessories

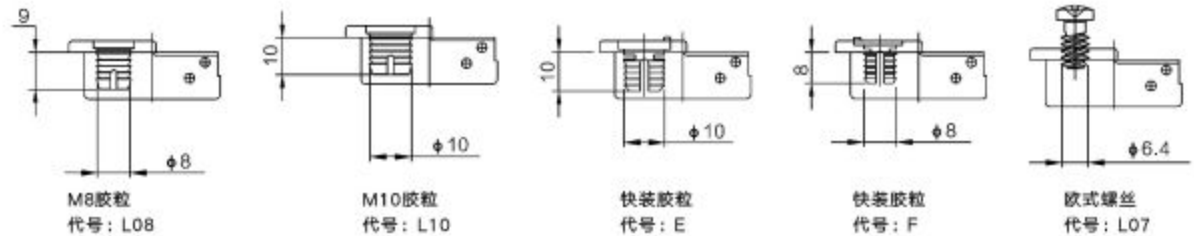


FT-9716 165°卡式铰链

FT-9716 165° Cassette Hinge

Product Description 产品描述




- * 开启角度: 165度
* Opening degree: 165°
- * 铰杯厚度: 11.5毫米
* Depth of cup: 11.5mm
- * 铰杯直径: 35毫米
* Cup diameter: 35mm
- * 面板(K)尺寸: 3-7毫米
* Drilling distance on door(K): 3-7mm
- * 门可选用板厚度: 14-26毫米
* Range of door thickness: 14-26mm

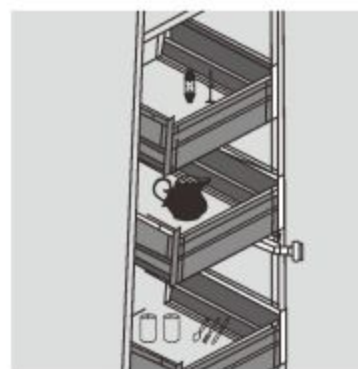

Design 设计


开门所需间隙



		K=门板钻孔到门板边沿距离												T=门板厚度	A=门板与柜侧的距离	L=门板与侧板的距离
		T=	14	15	16	17	18	19	20	21	22	23	24	25	26	
K=3	A=	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.5	1.0	1.6	2.1	2.7	
K=4	A=	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.3	0.9	1.4	2.0	2.6	
K=5	A=	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.7	1.2	1.8	2.3	
K=6	A=	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.4	0.5	1.1	1.6	2.2	
K=7	A=	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.3	0.4	0.9	1.5	2.0	

上面的参数基于门板边沿为直角边;如果门板边沿为圆角边,上述参数将相应减少。

铰杯安装孔位图 Cup drilling distance and depth

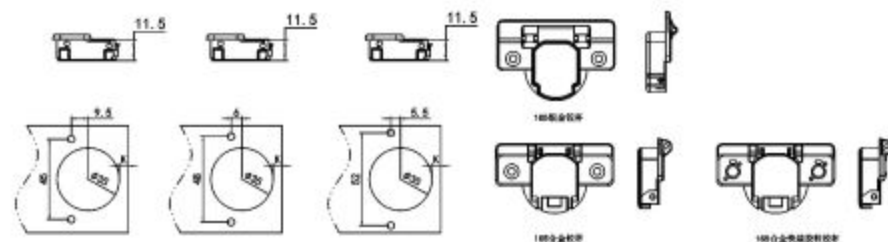


Installation Dimension Drawing 订购信息

Model: FT-9716F

直臂Full Overlay



H=14+K-D




Model: FT-9716H

中曲Half Overlay



H=4+K-D




Model: FT-9716I

大曲Insert



H=A+K+0

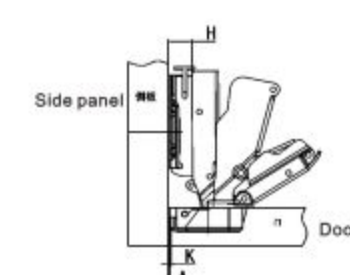

H=底座高度Height of mounting plate

D=侧板上所需盖位Distance by which the door over the side board.


K=门板外缘与铰杯钻孔距离Distance between edge of door and edge of cup hole

A=门与侧板间隙Reveal between door and side board

D overlay, A reveal calculation table D盖位, A间隙位计算值表

D	H	H=14+K-D					D	H	H=4+K-D					D	H	H=A+K+0				
		3	4	5	6	7			3	4	5	6	7			3	4	5	6	7
0	17	18	19	20	21		0	7	8	9	10	11		2	-1	-2	-3	-4	-5	
2	15	16	17	18	19		2	5	6	7	8	9		4	1	0	-1	-2	-3	
4	13	14	15	16	17		4	3	4	5	6	7								

Ø35铰杯可配螺丝/胶粒种类 dowels and screws for 35mm cup accessories

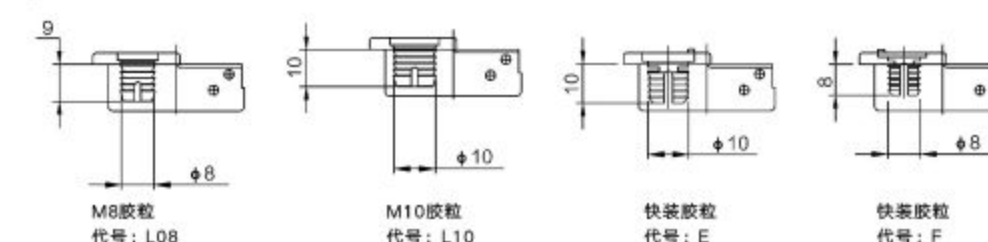

M8胶粒
代号: L08

M10胶粒
代号: L10

快装胶粒
代号: E

快装胶粒
代号: F




FT-9719 美式短臂铰链
FT-9719 American Short Arm Hinge

Product Description 产品描述




- * 开启角度: 105度
* Opening degree: 105°
- * 铰杯厚度: 11.5毫米
* Depth of cup: 11.5mm
- * 铰杯直径: 35毫米
* Cup diameter: 35mm
- * 面板(K)尺寸: 3-7毫米
* Drilling distance on door(K): 3-7mm
- * 门可选用板厚度: 14-22毫米
* Range of door thickness: 14-22mm

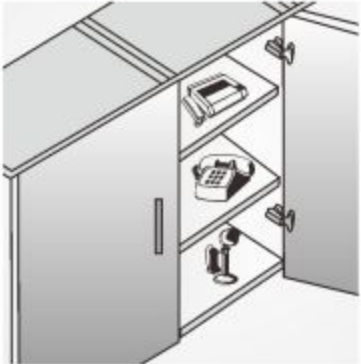


Installation Dimension Drawing 订购信息


Model: FT-9719F
直臂Full Overlay

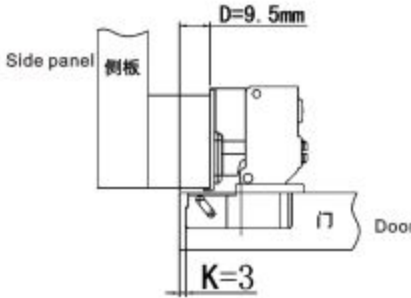

Model: FT-9719H
中曲Half Overlay




Model: FT-9719I
大曲Insert



D overlay, A reveal calculation table D盖位, A间隙位计算值表

H=14+K-D			H=4+K-D			H=K+A+0		
D	H	K	D	H	K	A	H	K
0			0			0		
2			2			2		
4			4			4		

Ø35铰杯可配螺丝/胶粒种类 dowels and screws for 35mm cup accessories

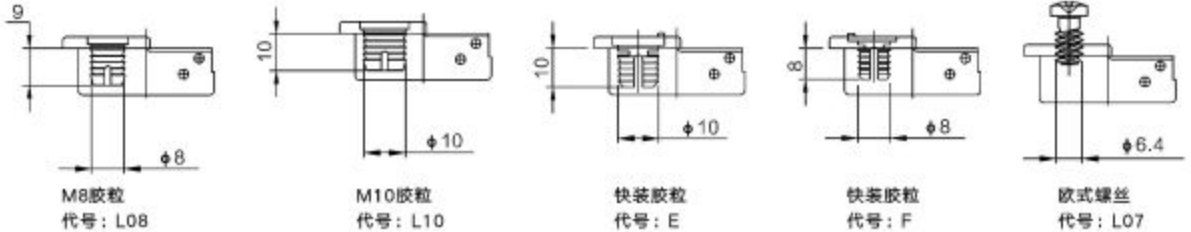


FT-9718 美式三维调节缓冲铰链

FT-9718 American Three Dimensional Adjustable Soft Close Hinge

Product Description 产品描述




- * 开启角度: 105度
- * Opening degree: 105°
- * 铰杯厚度: 10.9毫米
- * Depth of cup: 10.9mm
- * 铰杯直径: 35毫米
- * Cup diameter: 35mm
- * 面板(K)尺寸: 3毫米
- * Drilling distance on door(K): 3mm
- * 门可选用板厚度: 14-26毫米
- * Range of door thickness: 14-26mm

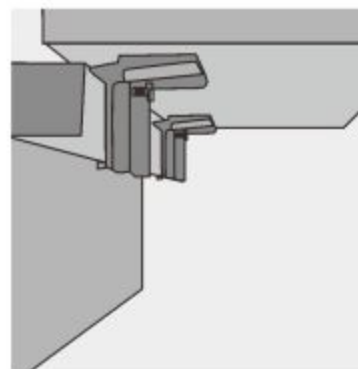


Installation Dimension Drawing 订购信息

铰杯安装孔位图 Cup drilling distance and depth

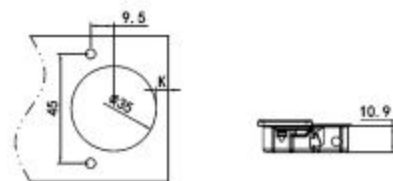


Ø35铰杯可配螺丝/胶粒种类 dowels and screws for 35mm cup accessories

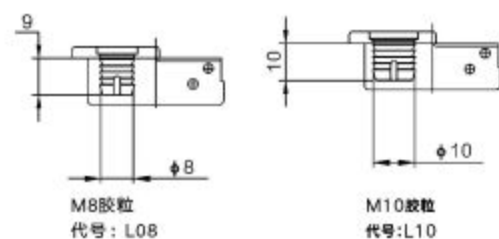


Installation Dimension Drawing 订购信息


1-1/4"

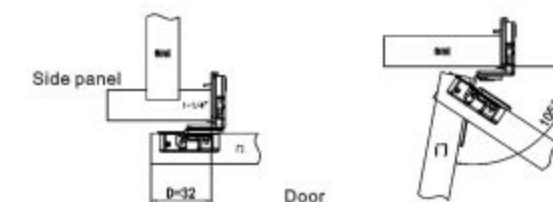


1-5/16"

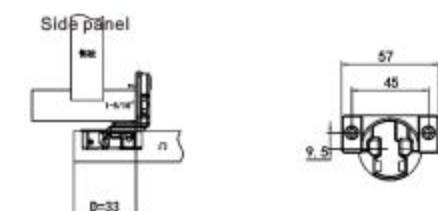


1/2"

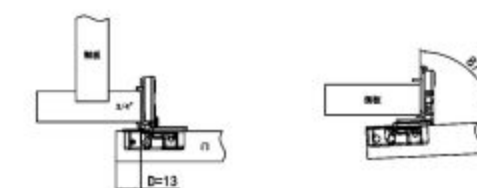

3/4"



1"




FT-9720 美式短臂固装缓冲铰链

FT-9720 American Short Arm Fixed Soft Close Hinge

Product Description 产品描述




- * 开启角度: 100度
* Opening degree: 100°
- * 铰杯厚度: 11.5毫米
* Depth of cup: 11.5mm
- * 铰杯直径: 35毫米
* Cup diameter: 35mm
- * 面板(K)尺寸: 3毫米
* Drilling distance on door(K): 3mm
- * 门可选用板厚度: 14-22毫米
* Range of door thickness: 14-22mm

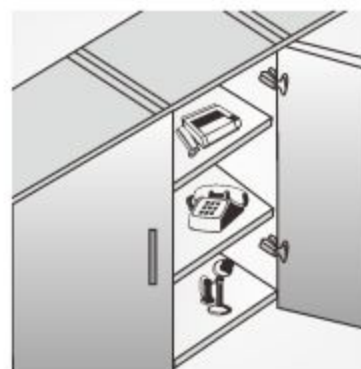


Installation Dimension Drawing 订购信息

铰杯安装孔位图 Cup drilling distance and depth

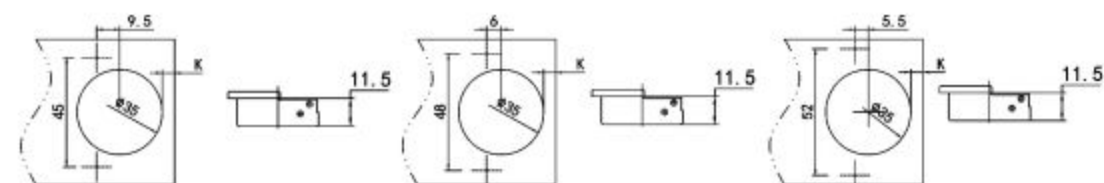

Ø35铰杯可配螺丝/胶粒种类 dowels and screws for 35mm cup accessories

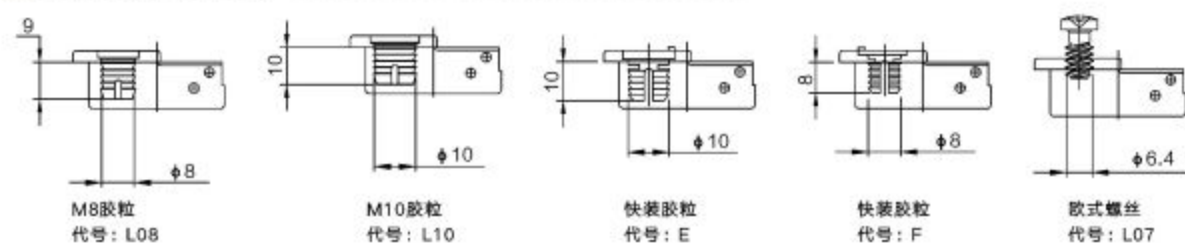

Installation Dimension Drawing 订购信息

3/8"

直臂Full Overlay







1/2"

中曲Half Overlay



5/8"

大曲Insert

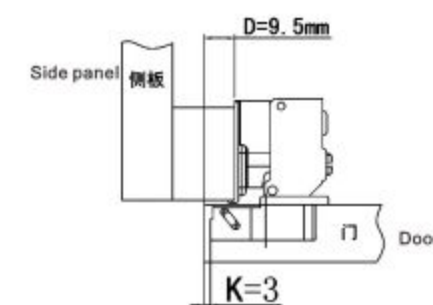



FT-CS-31 I三节欧式隐藏滑轨（把手版）

Full Extension Under Mounting Slides(soft Closing With Switch)European Type

Product Description 产品描述




- * 材质：镀锌板；
* Material: Galvanized steel
- * 材料厚度：1.8x1.5x1.0mm；
* Thickness: 1.8x1.5x1.0mm
- * 额定负重：35KG（450mm标准长度）；
* Load rating: 35KG (450mm as standard)
- * 使用寿命：过60000次；
* Cycling: 60,000 times
- * 尺寸范围：250-550mm，也可根据要求定制；
* Size range: 250mm-550mm, customized is available
- * 特殊功能：自动缓冲闭合；
* Special function: soft closing
- * 安装方式：把手连接，多向微调；
* Assembling: plastic switch, adjustable for multi-direction
- * 产品应用：办公家具、民用户具、橱柜等。
* Application: Commercial and residential furnitures, cabinets, etc.

Design 设计

安装孔位图


Hole pattern for installation

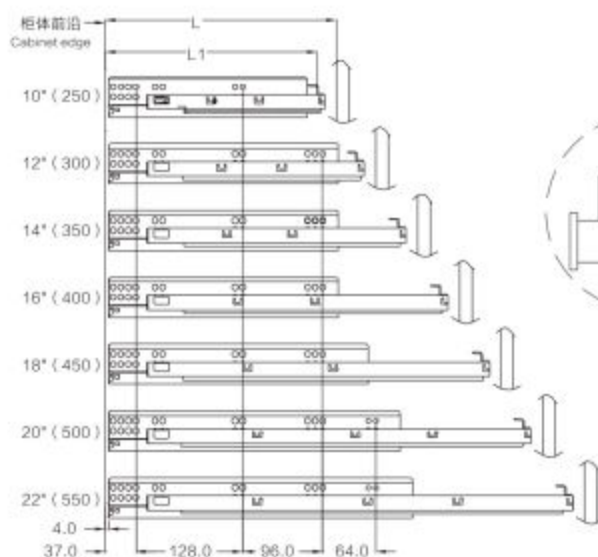

外置抽屉安装尺寸



内置抽屉安装尺寸


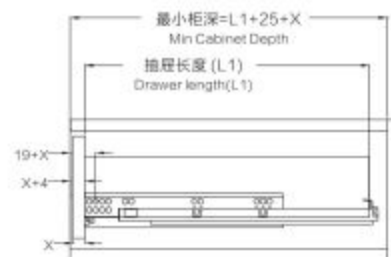


产品编号 Item No.	系列长度 Slide Length	抽屉长度(L1) Drawer Length(L1)	拉出长度 Pull-out Length	最小柜深(L) Min Cabinet Depth(L)	包装单位(套)/箱 Packing Unit(set)/Box
FT-CS-31I-10"	257MM	250MM	233MM	372MM	10
FT-CS-31I-12"	307MM	300MM	291MM	322MM	10
FT-CS-31I-14"	357MM	350MM	333MM	372MM	10
FT-CS-31I-16"	407MM	400MM	383MM	422MM	10
FT-CS-31I-18"	457MM	450MM	433MM	472MM	10
FT-CS-31I-20"	507MM	500MM	483MM	522MM	10
FT-CS-31I-22"	557MM	550MM	533MM	572MM	10

Installation Dimension Drawing 安装尺寸图



Space requirements for the cabinet

柜体内的空间需求

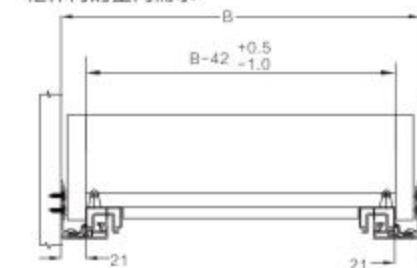

Drawer size and punching map

抽屉尺寸及打孔图

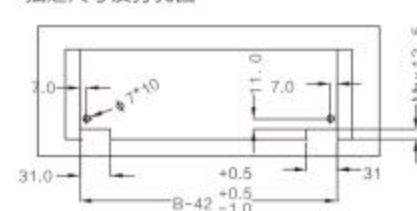

Installation Steps 安装步骤

Install the left and right sliding rails on both sides of the cabinet

将左右滑动轨安装在柜子两侧




Putting the drawer on the slide rail and push it into the cabinet, make the rail connect with the switches

将抽屉放在导轨上，然后推入柜体，活动轨与把手连接

Install the left and right adjustable handle on the bottom of the drawer

将左右把手安装抽屉底部

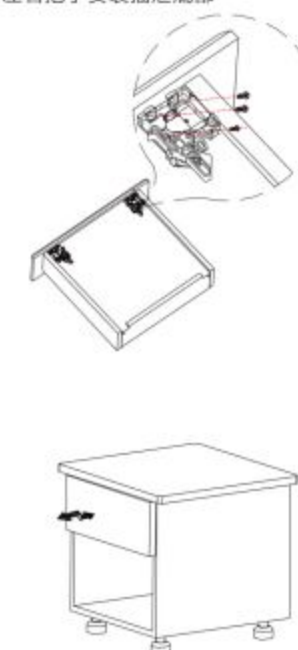

Pushing the drawer in then it closing slowly

将抽屉推入，缓冲关闭

FT-CS-33F三节欧式隐藏滑轨（调节钉版）

Full Extension Under Mounting Slides(soft Closing With Adjustable Pin)european Type

Product Description 产品描述




- * 材质：镀锌板；
* Material: Galvanized steel
- * 材料厚度：1.8x1.5x1.0mm；
* Thickness: 1.8x1.5x1.0mm
- * 额定负重：30KG（450mm标准长度）；
* Load rating: 30KG (450mm as standard)
- * 使用寿命：过60000次；
* Cycling: 60,000 times
- * 尺寸范围：250-550mm，也可根据要求定制；
* Size range: 250mm-550mm, customized is available
- * 特殊功能：自动缓冲闭合；
* Special function: soft closing
- * 安装方式：螺钉调节（可带插销），无需把手
* Assembling: adjustable pin and plastic plug, no more switch
- * 产品应用：办公家具、民用户具、橱柜等。
* Application: Commercial and residential furnitures, cabinets, etc.

Design 设计


安装孔位图

Hole pattern for installation

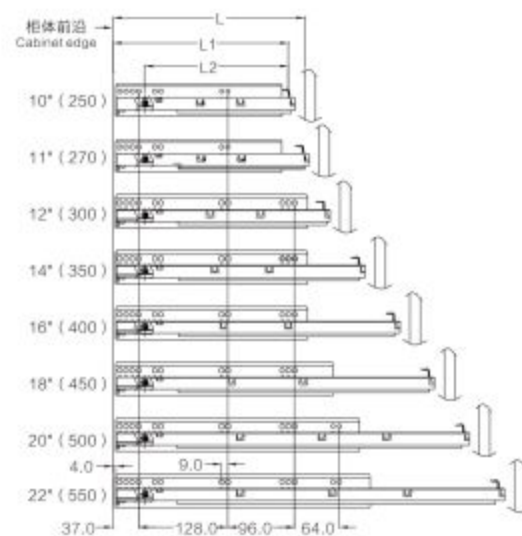

外置抽屉

Standard drawer

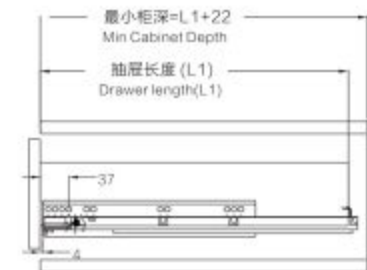


产品编号 Item No.	系列长度 Slide Length	抽屉长度(L1) Drawer Length(L1)	拉出长度 Pull-out Length	最小柜深(L) Min Cabinet Depth(L)	包装单位(套)/箱 Packing Unit(set)/Box	安装孔(L2) Assembling hole
FT-CS-33F-10"	258MM	250MM	230MM	370MM	10	206MM
FT-CS-33F-11"	278MM	270MM	250MM	390MM	10	226MM
FT-CS-33F-12"	308MM	300MM	288MM	320MM	10	256MM
FT-CS-33F-14"	358MM	350MM	330MM	370MM	10	306MM
FT-CS-33F-16"	408MM	400MM	380MM	420MM	10	356MM
FT-CS-33F-18"	458MM	450MM	430MM	470MM	10	406MM
FT-CS-33F-20"	508MM	500MM	480MM	520MM	10	456MM
FT-CS-33F-22"	558MM	550MM	530MM	570MM	10	506MM

Installation Dimension Drawing 安装尺寸图




Space requirements for the cabinet

柜体内的空间需求

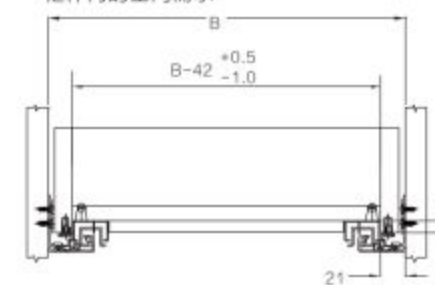


Drawer size and punching map

抽屉尺寸及打孔图

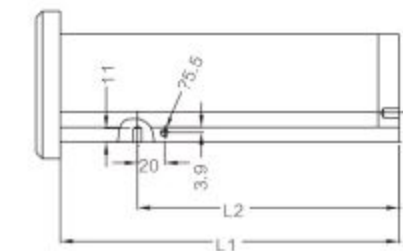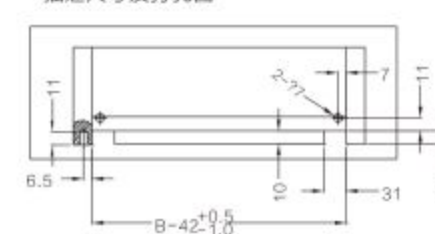



Installation Steps 安装步骤

Install the left and right sliding rails on both sides of the cabinet
将左右滑动轨安装在柜子两侧

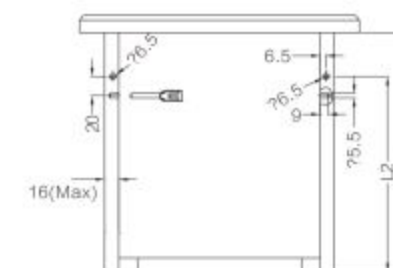

Putting the drawer on the slide rail, adjusting and inserting the screws into the drawer's holes, then pushing into the cabinet, finish the installment
将抽屉放在滑动轨上，调节螺丝钉插入抽屉孔内，然后推入柜体，安装完成

Pushing the drawer in then it closing slowly
将抽屉推入，缓冲关闭

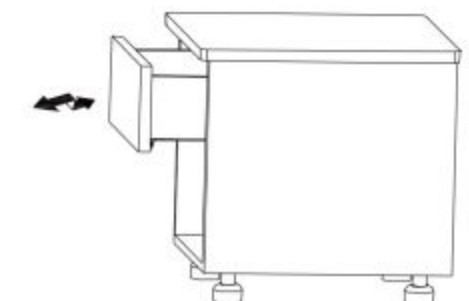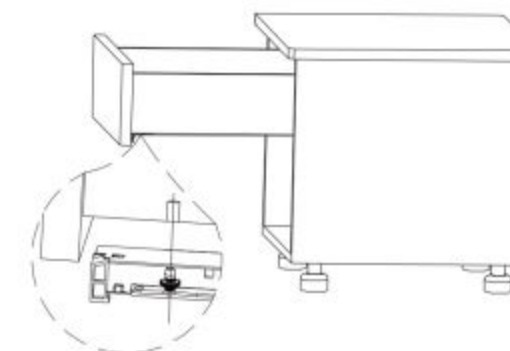

FT-CS-32B三节美式隐藏滑轨（把手版） Full Extension Under Mounting Slides(soft Closing With Switch)american Type


Product Description 产品描述




- * 材质：镀锌板；
* Material: Galvanized steel
- * 材料厚度：1.8x1.5x1.0mm；
* Thickness: 1.8x1.5x1.0mm
- * 额定负重：35KG（18"标准长度）；
* Load rating: 35KG (18" as standard)
- * 使用寿命：过50000次；
* Cycling: 50,000 times
- * 尺寸范围：12"-21"，也可根据要求定制；
* Size range: 12"-21", customized is available
- * 特殊功能：自动缓冲闭合；
* Special function: soft closing
- * 安装方式：把手连接，多向微调节；
* Assembling: plastic switch, adjustable for multi-direction
- * 产品应用：办公家具、民用户具、橱柜等。
* Application: Commercial and residential furnitures, cabinets, etc.

Design 设计

安装孔位图 Hole pattern for installation

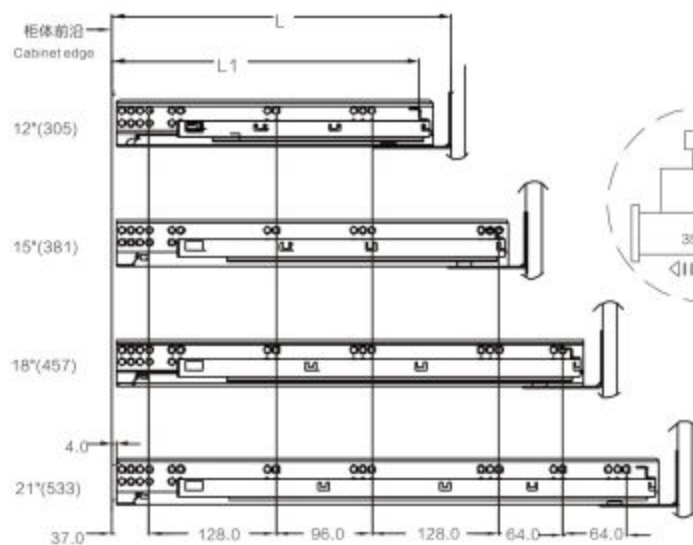



外置抽屉 Standard drawer

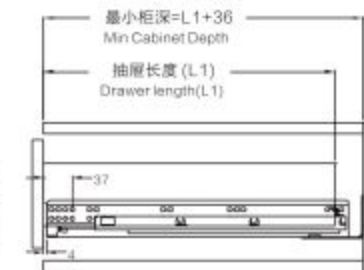



产品编号 Item No.	系列长度 Slide Length	抽屉长度(L1) Drawer Length(L1)	拉出长度 Pull-out Length	最小柜深(L) Min Cabinet Depth(L)	包装单位(套)/箱 Packing Unit(set)/Box
FT-CS-32E-12"	318MM	305MM	286MM	341MM ± 8	10
FT-CS-32E-15"	394MM	381MM	360MM	417MM ± 8	10
FT-CS-32E-18"	470MM	457MM	435MM	493MM ± 8	10
FT-CS-32E-21"	546MM	533MM	510MM	569MM ± 8	10

Installation Dimension Drawing 安装尺寸图

Space requirements for the cabinet 柜体内的空间需求

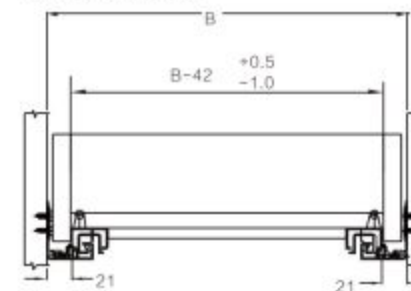


Drawer size and punching map 抽屉尺寸及打孔图

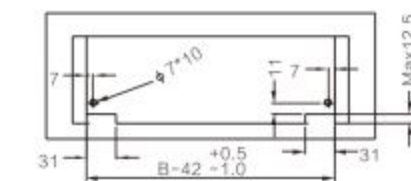


Installation Steps 安装步骤


Install the back bracket 尾板安装




Install the left and right sliding rails on both sides of the cabinet 将左右滑动轨安装在柜子两侧



Install the left and right adjustable handle on the bottom of the drawer 将左右把手安装抽屉底部

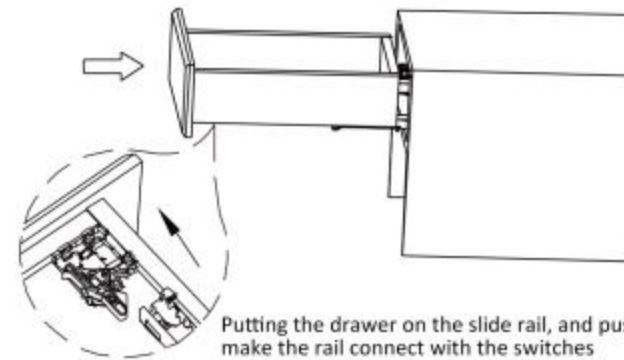

Putting the drawer on the slide rail, and push it into the cabinet, make the rail connect with the switches
将抽屉放在导轨上，然后推入柜体，活动轨与把手连接

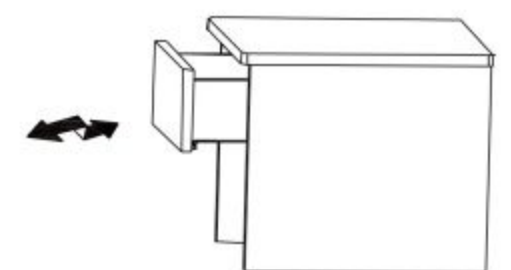

Push the drawer in then it closing slowly
将抽屉推入，缓冲关闭

FT-Y2HTJ二节隐藏滑轨（缓冲调整钉版） Single Extension Under Mounting Slides(soft-closing With Adjustable Pin)


Product Description 产品描述



- * 材质：镀锌板;
* Material: Galvanized steel
- * 材料厚度：1.5x1.5mm;
* Thickness: 1.5x1.5mm
- * 额定负重：25KG (450mm标准长度);
* Load rating: 25KG (450mm as standard)
- * 使用寿命：过50000次;
* Cycling: 50,000 times
- * 尺寸范围：250-550mm, 也可根据要求定制;
* Size range: 250mm-550mm, customized is available
- * 特殊功能：自动缓冲闭合;
* Special function: soft closing
- * 安装方式：螺钉调节（可带插销），无需把手
* Assembling: adjustable pin and plastic plug, no more switch
- * 产品应用：办公家具、民用户具、橱柜等。
* Application: Commercial and residential furnitures, cabinets, etc.

Design 设计


安装孔位图 Hole pattern for installation

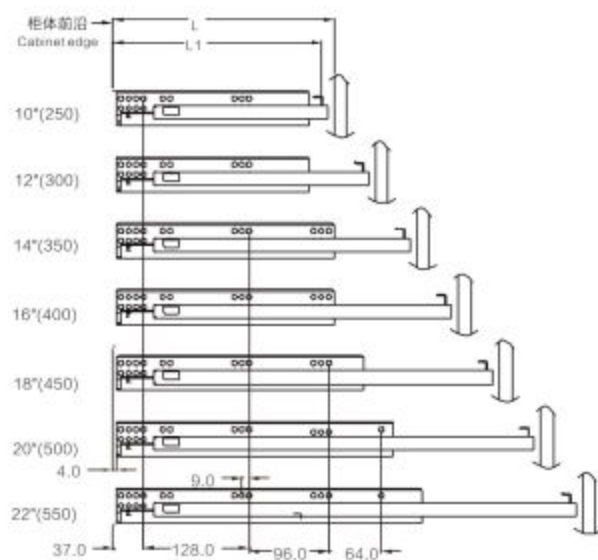

外置抽屉 Standard drawer




内置抽屉 Inner drawer

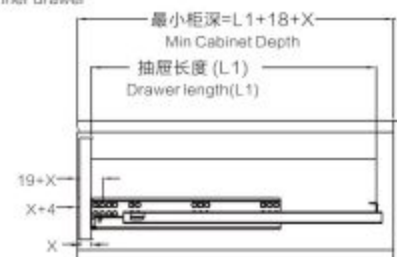




产品编号 Item No.	系列长度 Slide Length	抽屉长度(L1) Drawer Length(L1)	最小柜深(L) Min Cabinet Depth(L)	包装单位(套)/箱 Packing Unit(set)/Box
FT-Y2HTJ-10"	256MM	250MM	318MM	10
FT-Y2HTJ-12"	306MM	300MM	318MM	10
FT-Y2HTJ-14"	356MM	350MM	368MM	10
FT-Y2HTJ-16"	406MM	400MM	418MM	10
FT-Y2HTJ-18"	456MM	450MM	468MM	10
FT-Y2HTJ-20"	506MM	500MM	518MM	10
FT-Y2HTJ-22"	556MM	550MM	568MM	10

Installation Dimension Drawing 安装尺寸图


Space requirements for the cabinet 柜体内的空间需求

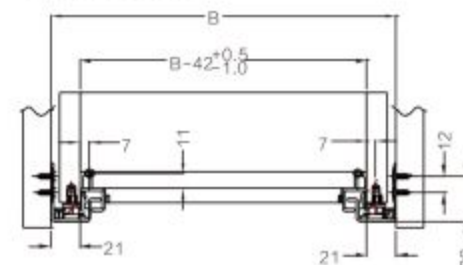


Drawer size and punching map 抽屉尺寸及打孔图

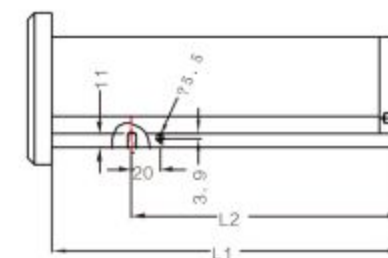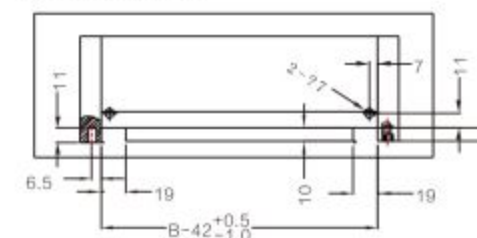

Installation Steps 安装步骤

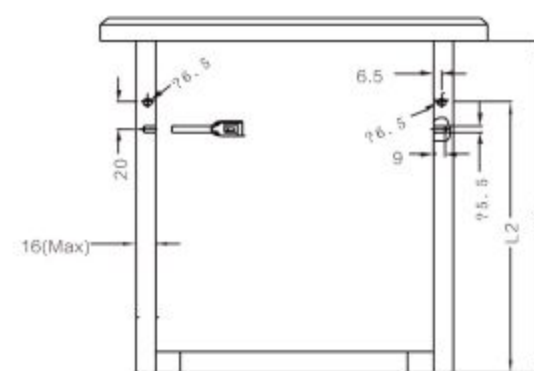


Putting the drawer on the slide rail, adjusting and inserting the screws into the drawer's holes, then pushing into the cabinet, finish the installment
将抽屉放在滑动轨上, 调节螺丝钉插入抽屉孔内, 与然后推入柜体, 安装完成

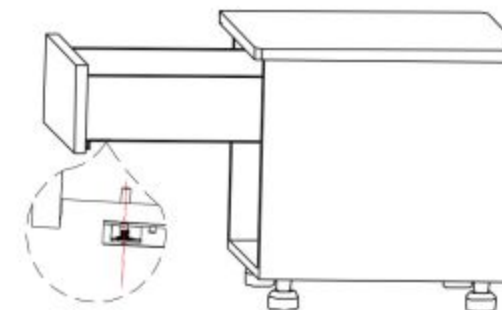

Install the left and right sliding rails on both sides of the cabinet
将左右滑动轨安装在柜子两侧



Push the drawer in then it closing slowly
将抽屉推入, 缓冲关闭

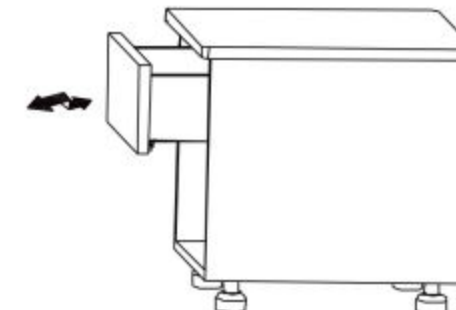

FT-Y222XB-C 二节隐藏滑轨 (缓冲把手版) Single Extension Under Mounting Slides(soft-Closing With Switch)

Product Description 产品描述




- * 材质: 镀锌板;
* Material: Galvanized steel
- * 材料厚度: 1.5x1.5mm;
* Thickness: 1.5x1.5mm
- * 额定负重: 25KG (450mm标准长度);
* Load rating: 25KG (450mm as standard)
- * 使用寿命: 过50000次;
* Cycling: 50,000 times
- * 尺寸范围: 250-550mm, 也可根据要求定制;
* Size range: 250mm-550mm, customized is available
- * 特殊功能: 自动缓冲闭合;
* Special function: soft closing
- * 安装方式: 把手连接, 多向微调节;
* Assembling: plastic switch, adjustable for multi-direction
- * 产品应用: 办公家具、民用户具、橱柜等。
* Application: Commercial and residential furnitures, cabinets, etc.

Design 设计


安装孔位图

Hole pattern for installation

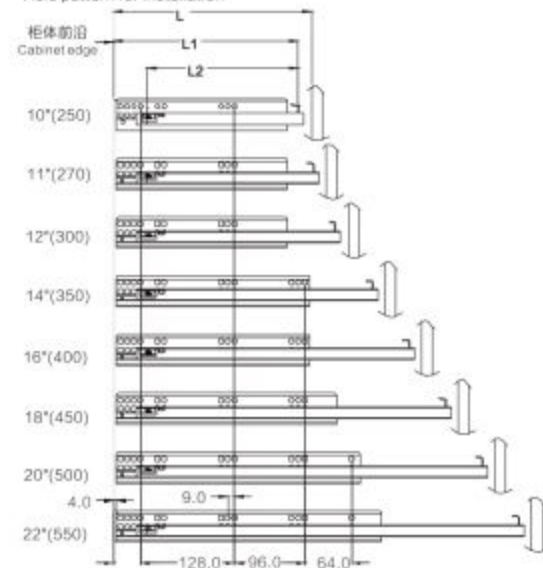

外置抽屉


Standard drawer

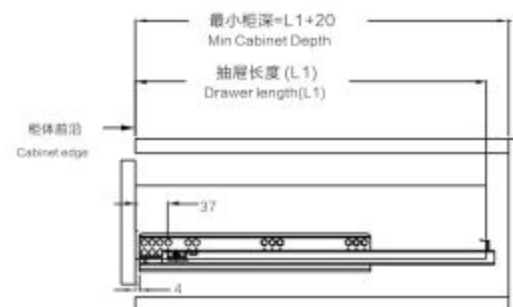




产品编号 Item No.	系列长度 Slide Length	抽屉长度(L1) Drawer Length(L1)	拉出长度 Pull-out Length	最小柜深(L) Min Cabinet Depth(L)	包装单位(套)/箱 Packing Unit(set)/Box
FT-Y222XB-C-10"	256MM	250MM	206MM	270MM	10
FT-Y222XB-C-11"	276MM	270MM	226MM	290MM	10
FT-Y222XB-C-12"	306MM	300MM	256MM	320MM	10
FT-Y222XB-C-14"	356MM	350MM	306MM	370MM	10
FT-Y222XB-C-16"	406MM	400MM	356MM	420MM	10
FT-Y222XB-C-18"	456MM	450MM	406MM	470MM	10
FT-Y222XB-C-20"	506MM	500MM	456MM	520MM	10
FT-Y222XB-C-22"	556MM	550MM	506MM	570MM	10

Installation Dimension Drawing 安装尺寸图

Space requirements for the cabinet 柜体内的空间需求


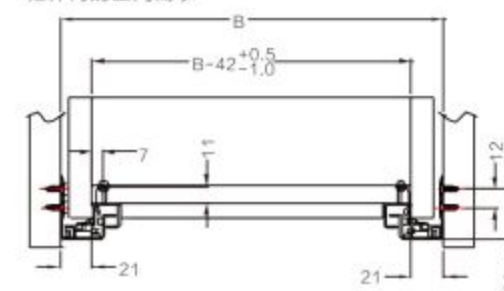


Drawer size and punching map 抽屉尺寸及打孔图

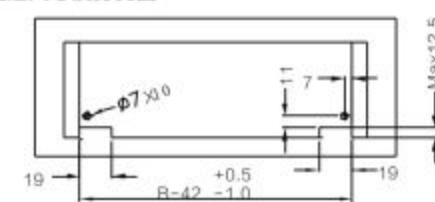


Installation Steps 安装步骤

Install the left and right adjustable handle
on the bottom of the drawer
将左右把手安装抽屉底部

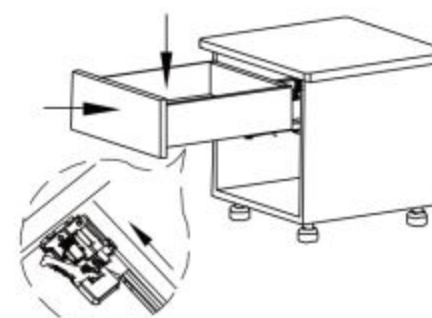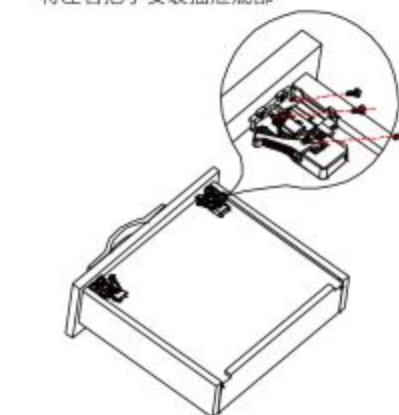

Putting the drawer on the slide rail, and push it into the cabinet,
make the rail connect with the switches
将抽屉放在导轨上, 然后推入柜体, 活动轨与把手连接

Install the left and right sliding rails
on both sides of the cabinet
将左右滑动轨安装在柜子两侧

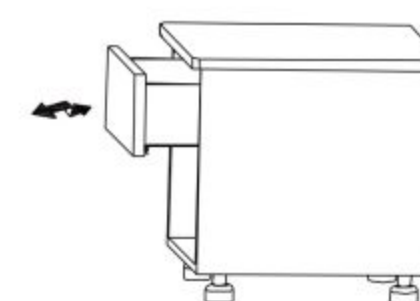

Pushing the drawer in then it closing slowly
将抽屉推入缓冲关闭

FT-Y2STJ/04二节反弹隐藏滑轨

FT-Y2STJ/04 Single Extension Rebounded Concealed Slide (with Adjustable Pin)


Product Description 产品描述



- * 材质: 镀锌板;
* Material: Galvanized steel
- * 材料厚度: 1.8x1.5x1.0mm;
* Thickness: 1.8x1.5x1.0mm
- * 额定负重: 30KG (450mm标准长度);
* Load rating: 30KG (450mm as standard)
- * 使用寿命: 过60000次;
* Cycling: 60,000 times
- * 尺寸范围: 250-550mm, 也可根据要求定制;
* Size range: 250mm-550mm, customized is available
- * 特殊功能: 自动缓冲闭合;
* Special function: soft closing
- * 安装方式: 螺钉调节 (可带插销), 无需把手
* Assembling: adjustable pin and plastic plug, no more switch
- * 产品应用: 办公家具、民用户具、橱柜等。
* Application: Commercial and residential furnitures, cabinets, etc.

Design 设计



安装孔位图 Hole pattern for installation

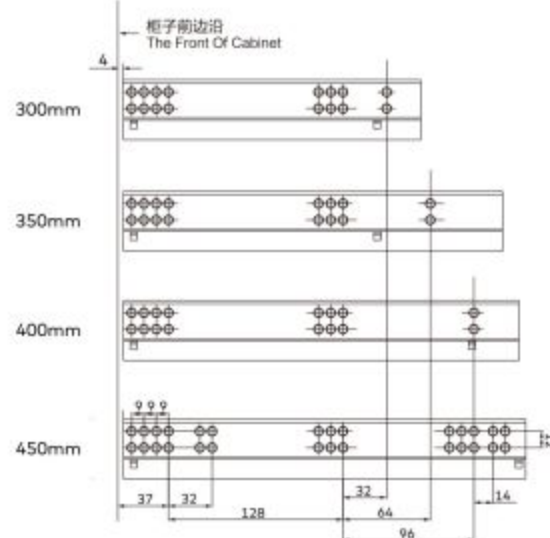

外置抽屉 Standard drawer





内置抽屉 Inner drawer

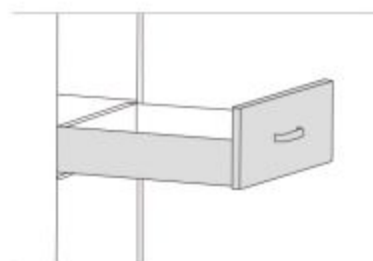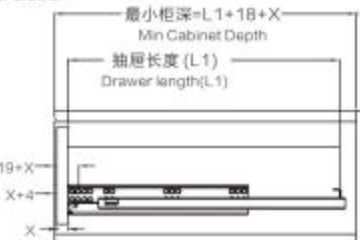

产品编号 Item No.	滑轨标称长度(L) Drawer Length(L1)	包装单位(套)/箱 Packing Unit(set)/Box
FT904-12"	300MM	10
FT904-14"	350MM	10
FT904-16"	400MM	10
FT904-18"	450MM	10

Installation Dimension Drawing 安装尺寸图

Space requirements for the cabinet 柜体内的空间需求

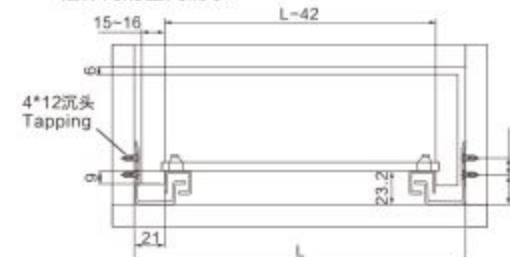

Drawer size and punching map 抽屉尺寸及打孔图




Installation Steps 安装步骤


Install the left and right sliding rails on both sides of the cabinet 将左右滑动轨安装在柜子两侧



Putting the drawer on the slide rail, adjusting and inserting the screws into the drawer's holes, then pushing into the cabinet, finish the installment
将抽屉放在滑动轨上, 调节螺丝钉插入抽屉孔内, 然后推入柜体, 安装完成

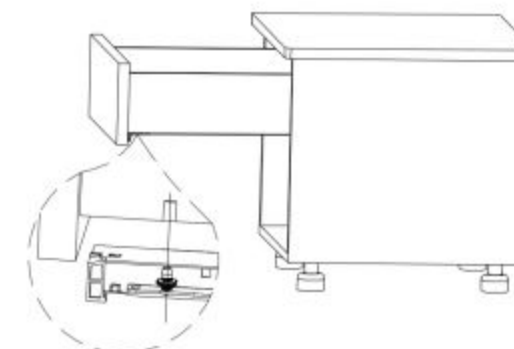

Push the drawer in then it closing slowly
将抽屉推入, 缓冲关闭

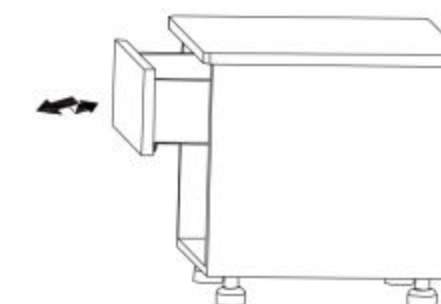

FT-2701 27mm宽二节钢珠滑轨 (单向滑动)
27mm Single extension slides(one way travel)


Product Description 产品描述



- * 材质：冷轧板
- * Material: Cold rolled steel
- * 材料厚度：1.2x1.2mm;
- * Thickness: 1.2x1.2mm
- * 额定负重：15KG (450mm标准长度)；
- * Load rating: 15KG (450mm as standard)
- * 使用寿命：过50000次；
- * Cycling: 50,000 times
- * 尺寸范围：250-600mm，也可根据要求定制；
- * Size range: 250mm-600mm, customized is available
- * 特殊功能：超静音、超顺滑
- * Special function: Ultra quiet, super smooth
- * 安装方式：侧部安装
- * Assembling: Side mounting;
- * 产品应用：铁柜、办公家具、民用家具、橱柜等。
- * Application: steel cabinets, office furniture, civil furniture, cabinets, etc.

Design 设计

安裝孔位圖
Hole pattern for installation

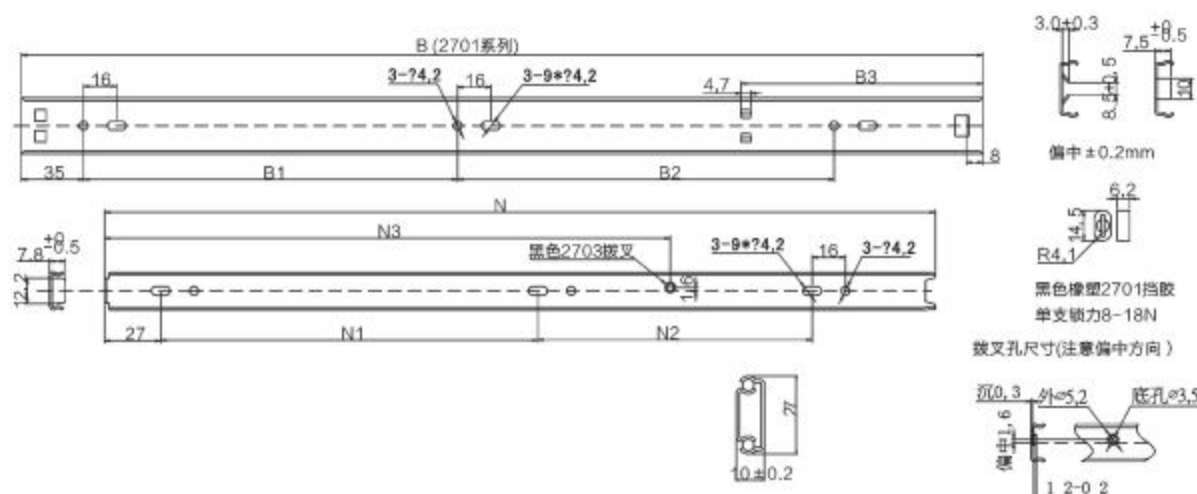

产品编号 Item No.	B	B1	B2	B3	拉出长度 ±2	珠架 (格)	N ±0.5	N1	N2	N3
FT-2701-10*	250	128	-	40	167	4	248	192	-	210
FT-2701-12*	300	128	96	58	186	4	298	128	96	233
FT-2701-14*	350	128	128	75	247	5	348	128	160	290
FT-2701-16*	400	128	192	90	282	6	398	128	192	326
FT-2701-18*	450	160	192	100	317	7	448	160	192	361
FT-2701-20*	500	192	192	95	352	8	498	192	192	397
FT-2701-22*	550	224	224	128	390	9	548	224	224	434
FT-2701-24*	600	256	256	145	426	10	598	256	256	467



FT-4501 45mm宽三节钢珠滑轨
45mm Full extension slides


Product Description 产品描述



- * 材质：冷轧板
- * Material: Cold rolled steel
- * 材料厚度：1.0x1.0x1.2mm; 1.1x1.1x1.4mm; 1.2x1.2x1.5mm;
- * Thickness: 1.0x1.0x1.2mm; 1.1x1.1x1.4mm; 1.2x1.2x1.5mm
- * 额定负重：30-45KG (450mm标准长度)；
- * Load rating: 30-45KG (450mm as standard)
- * 使用寿命：过50000次；
- * Cycling: 50,000 times
- * 尺寸范围：250-700mm，也可根据要求定制；
- * Size range: 250mm-700mm, customized is available
- * 特殊功能：超静音、超顺滑
- * Special function: Ultra quiet, super smooth
- * 安装方式：侧部安装
- * Assembling: Side mounting;
- * 产品应用：铁柜、办公家具、民用户具、橱柜等。
- * Application: steel cabinets, office furniture, civil furniture, cabinets, etc.

Design 设计

安裝孔位圖
Hole pattern for installation

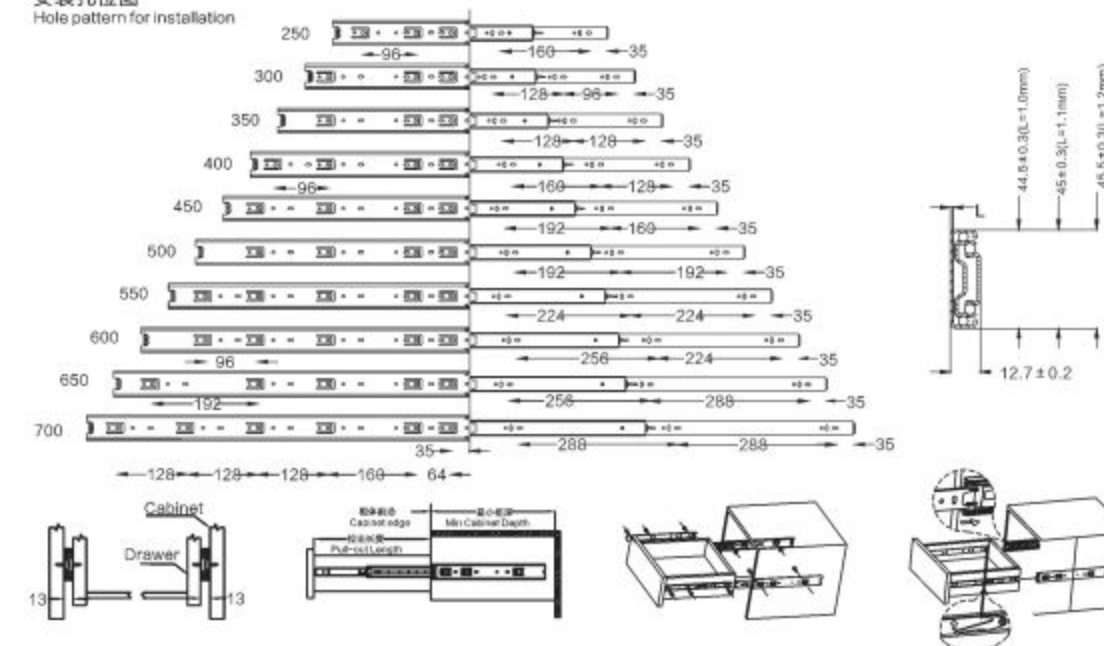

产品编号 Item No.	系列长度 Slide Length	抽屉长度(L1) Drawer Length(L1)	最小柜深(L) Min Cabinet Depth(L)	产品编号 Item No.	系列长度 Slide Length	抽屉长度(L1) Drawer Length(L1)	最小柜深(L) Min Cabinet Depth(L)	包装单位(套)/箱 Packing Unit(set)/box
FT-4501-10*	250MM	250MM	254MM	FT-4501-20*	500MM	500MM	504MM	10
FT-4501-12*	300MM	300MM	304MM	FT-4501-22*	550MM	550MM	554MM	10
FT-4501-14*	350MM	350MM	354MM	FT-4501-24*	600MM	600MM	604MM	10
FT-4501-16*	400MM	400MM	404MM	FT-4501-26*	550MM	550MM	554MM	10
FT-4501-18*	450MM	450MM	454MM	FT-4501-28*	600MM	600MM	704MM	10

FT-4503TDK 45mm宽三节钢珠滑轨(铁柱缓冲版)

FT-4503TDK 45mm Full Extension Slides(soft Closing)

Product Description 产品描述




- * 材质：冷轧板
* Material: Cold rolled steel
- * 材料厚度：1.0x1.0x1.2mm; 1.1x1.1x1.4mm; 1.2x1.2x1.5mm;
* Thickness: 1.0x1.0x1.2mm; 1.1x1.1x1.4mm; 1.2x1.2x1.5mm
- * 额定负重：30-45KG (450mm标准长度)；
* Load rating: 30-45KG (450mm as standard)
- * 使用寿命：过50000次；
* Cycling: 50,000 times
- * 尺寸范围：300-700mm，也可根据要求定制；
* Size range: 300mm-700mm, customized is available
- * 特殊功能：稳定的缓冲结构，缓冲行程55mm
* Special function: stable buffer structure, damping distance 55mm
- * 安装方式：侧部安装
* Assembling: Side mounting;
- * 产品应用：铁柜、办公家具、民用家具、橱柜等。
* Application: steel cabinets, office furniture, civil furniture, cabinets, etc.

Design 设计

安装孔位图

Hole pattern for installation

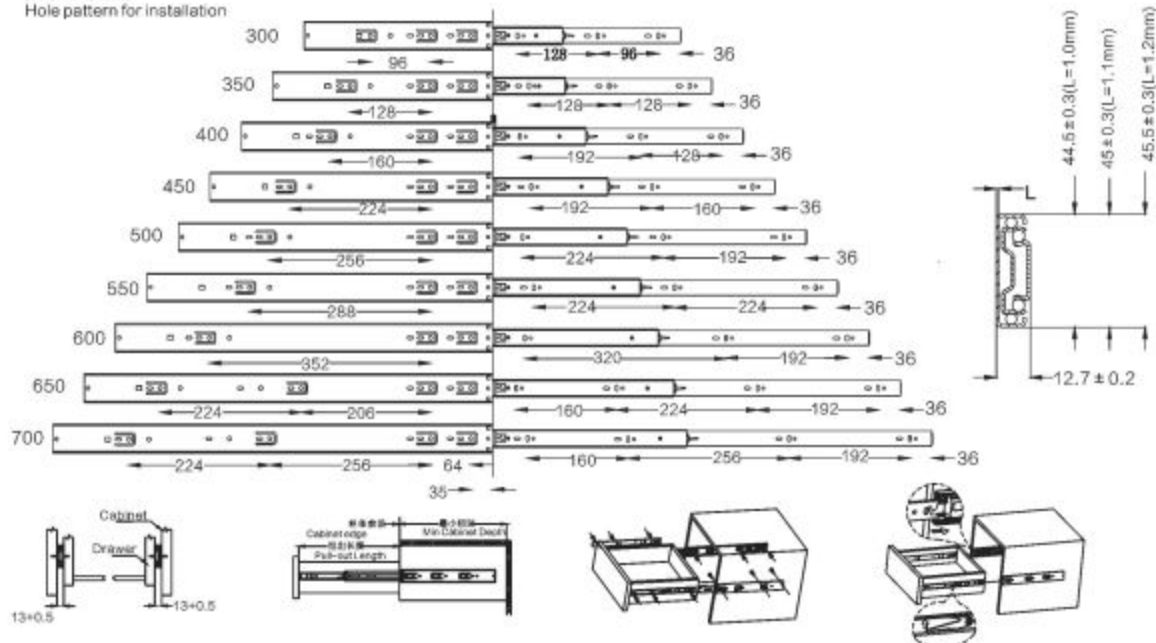

FT-3503 35mm宽三节滑轨

FT-3503 35mm Width Full Extension Slide



Product Description 产品描述



- * 材质：冷轧板
* Material: Cold rolled steel
- * 材料厚度：0.8x0.8x0.8mm;
* Thickness: 0.8x0.8x0.8mm
- * 额定负重：15KG (450mm标准长度);
* Load rating: 15KG (450mm as standard)
- * 使用寿命：过50000次;
* Cycling: 50,000 times
- * 尺寸范围：250-600mm, 也可根据要求定制;
* Size range: 250mm-600mm, customized is available
- * 特殊功能：超静音、超顺滑
* Special function: Ultra quiet, super smooth
- * 安装方式：侧部安装
* Assembling: Side mounting;
- * 产品应用：铁柜、办公家具、民用家具、橱柜等。
* Application: steel cabinets, office furniture, civil furniture, cabinets, etc.

Design 设计

安装孔位图 Hole pattern for installation

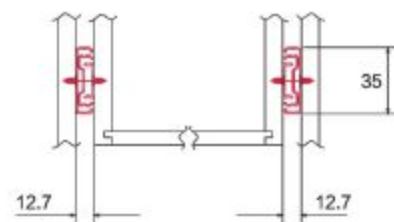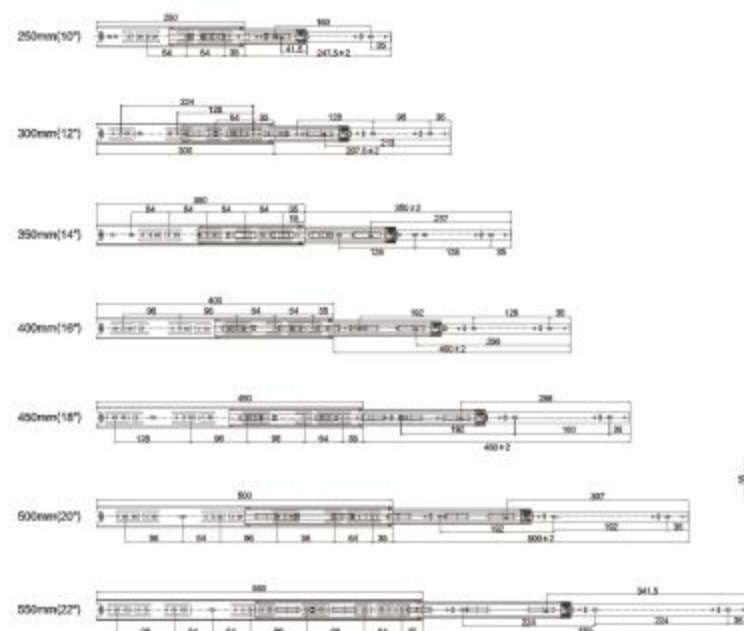

产品编号 Item No.	滑轨长度(L) Length of slide rail (L)	拉出长度(T) Pull out the length (T)	产品编号 Item No.	滑轨长度(L) Length of slide rail (L)	拉出长度(T) Pull out the length (T)	包装单位(套)/箱 Packing Unit(set)/Box
FT-3503-10"	250MM	247±2MM	FT-3503-18"	450MM	450±2MM	20
FT-3503-12"	300MM	297±2350MM	FT-3503-20"	500MM	500±2MM	20
FT-3503-14"	350MM	350±2MM	FT-3503-22"	550MM	550±2MM	20
FT-3503-16"	400MM	400±2MM	FT-3503-24"	600MM	600±2MM	20

FT-7765 喷粉轨

FT-7765 Powder Slide



Product Description 产品描述



- * 材质：冷轧板
* Material: Cold rolled steel
- * 材料厚度：0.8-1.2mm;
* Thickness: 0.8-1.2mm
- * 额定负重：20KG
* Load rating: 20KG (450mm as standard)
- * 使用寿命：过50000次;
* Cycling: 50,000 times
- * 尺寸范围：250-600mm, 也可根据要求定制;
* Size range: 250mm-600mm, customized is available
- * 特殊功能：超静音、超顺滑
* Special function: Ultra quiet, super smooth
- * 安装方式：侧部安装
* Assembling: Side mounting;
- * 产品应用：铁柜、办公家具、民用家具、橱柜等。
* Application: steel cabinets, office furniture, civil furniture, cabinets, etc.

Design 设计

安装孔位图 Hole pattern for installation

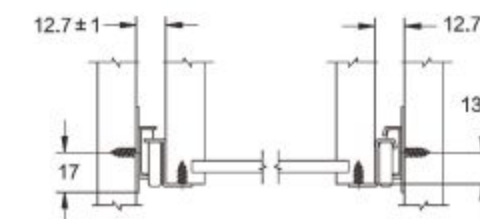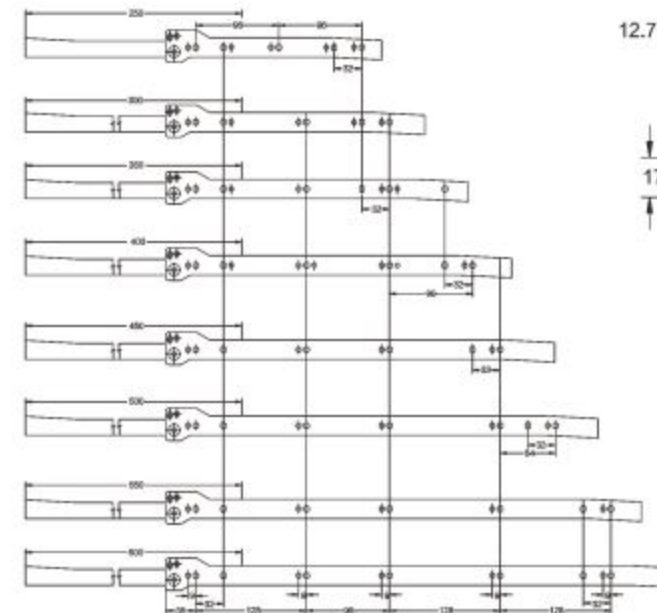

产品编号 Item No.	滑轨长度(L) Length of slide rail (L)	拉出长度(T) Pull out the length (T)	产品编号 Item No.	滑轨长度(L) Length of slide rail (L)	拉出长度(T) Pull out the length (T)	包装单位(套)/箱 Packing Unit(set)/Box
FT-7765-10"	250MM	178MM	FT-7765-18"	450MM	368MM	30
FT-7765-12"	300MM	228MM	FT-7765-20"	500MM	411MM	30
FT-7765-14"	350MM	278MM	FT-7765-22"	550MM	453MM	30
FT-7765-16"	400MM	328MM	FT-7765-24"	600MM	493MM	30



F218N 骑马抽

F218N Horse stroke

Product Description 产品描述



- * 选配更加坚固侧板创造更多储存空间,整体加高不易刮伤抽屉侧板
* Heightened drawer side to create more storage space
- * 整体简化缔造更多品质生活,优异静音滑行功能
* Simple design with excellent silent motion of drawer
- * 动态负载最少30kg
* Load capacity: 30kg
- * 面板安装无需工具
* Front installation without tools
- * 二维面板调节
* 2-dimensional adjustment
- * 使用凡态单点阻尼摇摆系统,确保关闭轻柔 and 安静
* FILTA SOFT close system makes the closing of drawer gently and silently

Order Information 订购信息

产品组件

1	产品编号 Item No.	滑轨基本长度 Nominal Length	抽屉最小安装长度 Min. internal Cabinet Depth	最小安装高度 Height	毛重(kg) G.w. (kg)	每箱装数 Sets/cdn	体积 Measurements(cm)
	F218N-270	270MM	290MM	185MM	11.5	4	29.5*34.5*21.5
	F218N-300	300MM	320MM	185MM	12.5	4	32.5*34.5*21.5
	F218N-350	350MM	370MM	185MM	14.5	4	37.5*34.5*21.5
	F218N-400	400MM	420MM	185MM	16	4	42.5*34.5*21.5
	F218N-450	450MM	470MM	185MM	17.5	4	47.5*34.5*21.5
	F218N-500	500MM	520MM	185MM	18.5	4	52.5*34.5*21.5
	F218N-550	550MM	570MM	185MM	20	4	57.5*34.5*21.5



滑轨 左/右
灰色 Gray
镀锌卷 Galvanized steel coil



后接码 (x2)
灰色 Gray
铁 Iron



压入式前接码 (选配) (x2)
银色 Silver
锌合金 Zinc alloy



侧板 左/右(特款颜色可洽谈)
灰色 Gray
铁 Iron



前接码 (x2)
银色 Silver
锌合金 Zinc alloy




商标装饰盖 (x2)
灰色 Gray
尼龙 Nylon



组装成抽屉的效果


Installation Instructions 安装说明

柜体内的空间需求




抽屉帮前接码面板的安装尺寸

* 不要忽略面板的重叠部分




抽屉帮背板安装尺寸

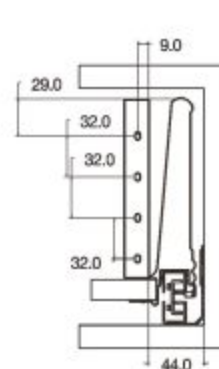

安装孔位图

Hole pattern for installation

标称长度mm 阻尼滑轨孔位图

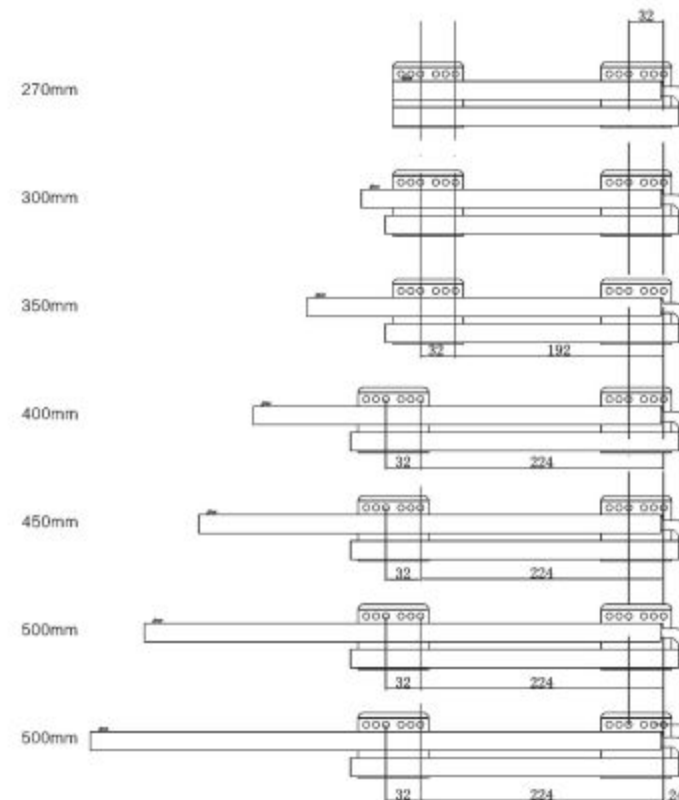

低抽屉抽屉板的裁切尺寸



抽屉在柜体所需空间



F218 骑马抽

F218 Horse stroke

Product Description 产品描述



* 普通低侧板,可灵活分配抽屉内的分隔组件,使抽屉
柔性随意储存
* low internal drawer, you can make full use of the space with
various dividing and cutlery to choose

* 动态负载最少30kg
* Load capacity:30kg

* 面板安装无需工具
* Front installation without tools

* 二维面板调节
* 2-dimensional adjustment

* 使用凡态单点阻尼摇摆系统, 确保关闭轻柔 and 安静
* FILTA SOFT close system makes the closing of drawer gently
and silently

Order Information 订购信息

产品组件

1	产品编号 Item No.	滑轨基本长度 Nominal Length	抽屉最小安装长度 Min. internal Cabinet Depth	最小安装高度 Height	毛重(kg) G.w. (kg)	每箱装数 Sets/cdn	体积 Measurements(cm)
	F218P-270	270MM	290MM	105MM	13	6	29.5*34.5*21.5
	F218P-300	300MM	320MM	105MM	15	6	32.5*34.5*21.5
	F218P-350	350MM	370MM	105MM	18	6	37.5*34.5*21.5
	F218P-400	400MM	420MM	105MM	19.7	6	42.5*34.5*21.5
	F218P-450	450MM	470MM	105MM	21.5	6	47.5*34.5*21.5
	F218P-500	500MM	520MM	105MM	23.8	6	52.5*34.5*21.5
	F218P-550	550MM	570MM	105MM	25.7	6	57.5*34.5*21.5



滑轨 左/右
灰色 Gray



后接码 (x2)
灰色 Gray
铁 Iron



压入式前接码 (选配) (x2)
银色 Silver
锌合金 Zinc alloy



侧板 左/右(特款颜色可洽谈)
灰色 Gray
铁 Iron



前接码 (x2)
镀锌板 Galvanized steel coil
银色 Silver
锌合金 Zinc alloy




商标装饰盖 (x2)
灰色 Gray
尼龙 Nylon




组装成抽屉的效果

Installation Instructions 安装说明


柜体内的空间需求



抽屉帮前接码面板的安装尺寸 *不要忽略面板的重叠部分




抽屉帮背板安装尺寸



安装孔位图

Hole pattern for installation

标称长度mm 阻尼滑轨孔位图

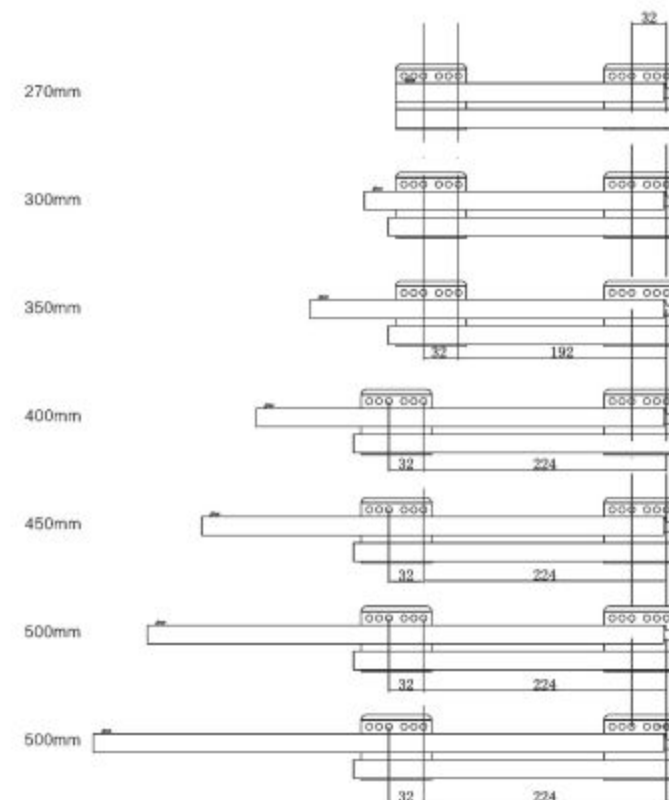

低抽屉帮板的裁切尺寸



抽屉在柜体所需空间



F218G 骑马抽

F218G Horse stroke

Product Description 产品描述



- * 高一杆抽屉，方便提供丰富多彩的分隔储存空间解决方案，可随意调整分隔系统
* one gallery drawer to increase the inner space of drawer
- * 动态负载最少30kg
* Load capacity: 30kg
- * 面板安装无需工具
* Front installation without tools
- * 二维面板调节
* 2-dimensional adjustment
- * 使用凡态单点阻尼摇摆系统，确保关闭轻柔 and 安静
* FILTA SOFT close system makes the closing of drawer gently and silently

Order Information 订购信息

产品组件

1	产品编号 Item No.	滑轨基本长度 Nominal Length	抽屉最小安装长度 Min. Internal Cabinet Depth	最小安装高度 Height	毛重(kg) G.w. (kg)	每箱装数 Sets/cdn	体积 Measurements(cm)
	F218G-270	270MM	290MM	185MM	14.5	6	29.5*34.5*21.5
	F218G-300	300MM	320MM	185MM	17	6	32.5*34.5*21.5
	F218G-350	350MM	370MM	185MM	19	6	37.5*34.5*21.5
	F218G-400	400MM	420MM	185MM	21	6	42.5*34.5*21.5
	F218G-450	450MM	470MM	185MM	23	6	47.5*34.5*21.5
	F218G-500	500MM	520MM	185MM	25.5	6	52.5*34.5*21.5
	F218G-550	550MM	570MM	185MM	27.5	6	57.5*34.5*21.5



滑轨左/右

灰色 Gray

镀锌卷 Galvanized steel coil



侧板左/右(特款颜色可洽谈)

灰色 Gray

铁 Iron



前接码 (x2)

银色 Silver

锌合金 Zinc alloy



商标装饰盖 (x2)

灰色 Gray

尼龙 Nylon



后接码 (x2)

灰色 Gray

铁 Iron



铝管左/右 (x2)

铝材色 Aluminum

铝 Aluminum



压入式前接码 (选配) (x2)

银色 Silver

锌合金 Zinc alloy



压入式铝管前接码 (选配) (x2)

银色 Silver


锌合金 Zinc alloy



组装成抽屉的效果


Installation Instructions 安装说明

柜体内的空间需求

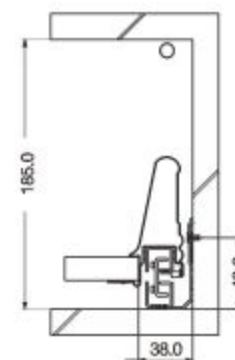


抽屉帮前接码面板的安装尺寸

* 不要忽略面板的重叠部分

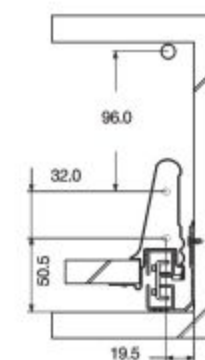


抽屉帮背板安装尺寸

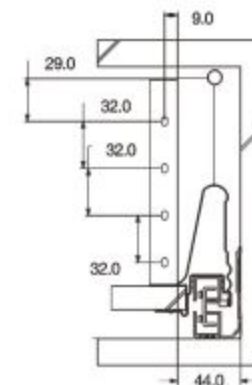

安装孔位图

Hole pattern for installation

标称长度mm 阻尼滑轨孔位图

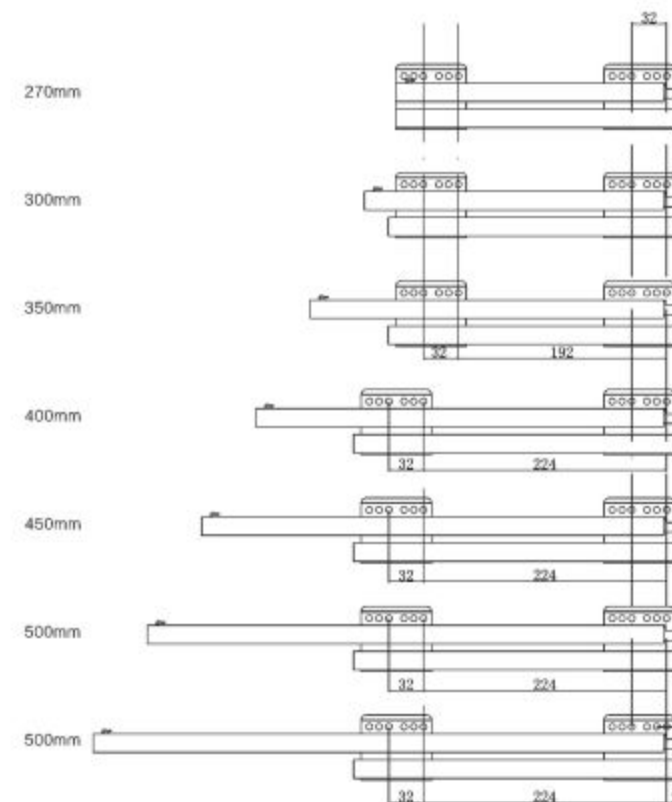

低抽帮抽屉板的裁切尺寸



抽屉在柜体所需空间




铝管塑料配件



铝管塑料 (x2)

灰色 Gray

尼龙 Nylon



铝管套 (x2)

灰色 Gray

尼龙 Nylon



铝管后接码 (x2)

灰色 Gray

尼龙 Nylon



预埋式铝管前接码 (x2)

灰色 Gray

尼龙 Nylon

N218H 骑马抽

N218H Horse stroke

Product Description 产品描述



- * 高二杆内置抽屉，与外抽屉组合提升储存空间
* Two gallery drawer to increase the inner space of drawer
- * 三联动完美比例，保证滑动顺畅
* Three linkage perfect proportion, ensure smooth sliding
- * 动态负载最少30kg
* Load capacity: 30kg
- * 面板安装无需工具
* Front installation without tools
- * 二维面板调节
* 2-dimensional adjustment
- * 使用凡态单点阻尼摇摆系统，确保关闭轻柔 and 安静
* FILTA SOFT close system makes the closing of drawer gently and silently

Order Information 订购信息

产品组件

1	产品编号 Item No.	滑轨基本长度 Nominal Length	抽屉最小安装长度 Min. internal Cabinet Depth	最小安装高度 Height	毛重(kg) G.w. (kg)	每箱装数 Sets/cdn	体积 Measurements(cm)
	N218H-270	270MM	290MM	225MM	15.5	6	29.5*34.5*21.5
	N218H-300	300MM	320MM	225MM	17.5	6	32.5*34.5*21.5
	N218H-350	350MM	370MM	225MM	19.5	6	37.5*34.5*21.5
	N218H-400	400MM	420MM	225MM	21.5	6	42.5*34.5*21.5
	N218H-450	450MM	470MM	225MM	23.5	6	47.5*34.5*21.5
	N218H-500	500MM	520MM	225MM	26	6	52.5*34.5*21.5
	N218H-550	550MM	570MM	225MM	28	6	57.5*34.5*21.5



1 滑轨左/右
灰色 Gray
镀锌卷 Galvanized steel coil



2 侧板左/右(特款颜色可洽谈)
灰色 Gray
铁 Iron



3 内抽高塑料件 (x2)
灰色 Gray
尼龙 Nylon



4 商标装饰盖 (x2)
灰色 Gray
尼龙 Nylon




5 后接码 (x2)
灰色 Gray
铁 Iron



6 铝管左/右(x4)
铝材色 Aluminum
铝 Aluminum



9 内抽前把手
灰色 Gray
尼龙 Nylon



7 内抽前铝管(宽度可调节)
铝材色 Aluminum
铝 Aluminum




8 内抽前铝管(宽度可调节)
铝材色 Aluminum
铝 Aluminum



组装成抽屉的效果

Installation Instructions 安装说明


柜体内的空间需求

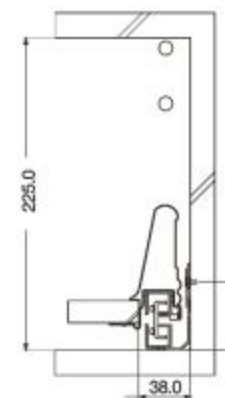

前接码面板的安装尺寸




背板安装尺寸

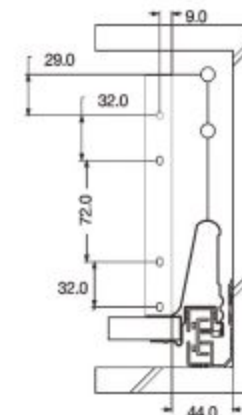

安装孔位图

Hole pattern for installation

标称长度mm 阻尼滑轨孔位图

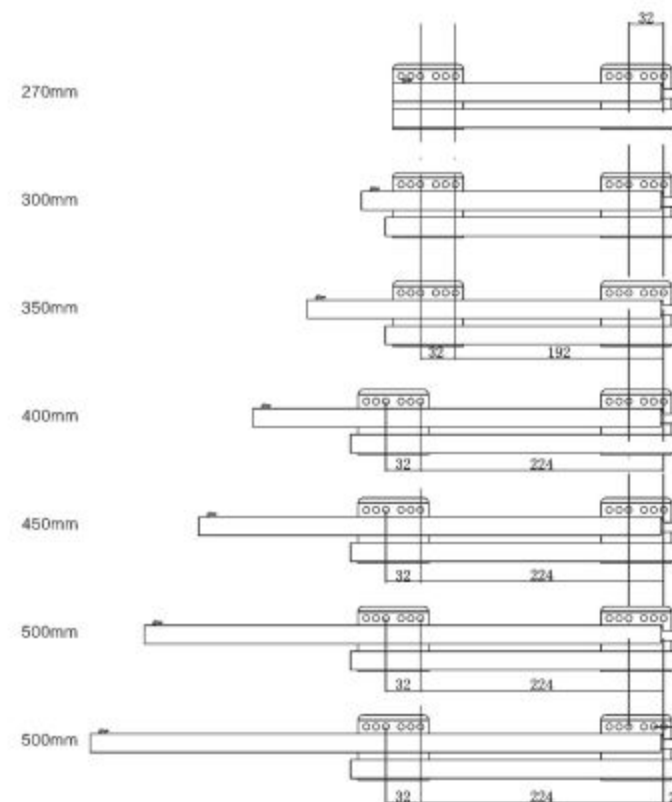

低抽帮抽屉板的裁切尺寸



抽屉在柜体所需空间



铝管塑料配件



铝管塑料后接码 (x2)
灰色 Gray
尼龙 Nylon



铝管后接码 (x2)
灰色 Gray
尼龙 Nylon





9764 谷仓门配件 9764 Barn door fittings


Product Description 产品描述



* 材质: 铁
* Material: iron

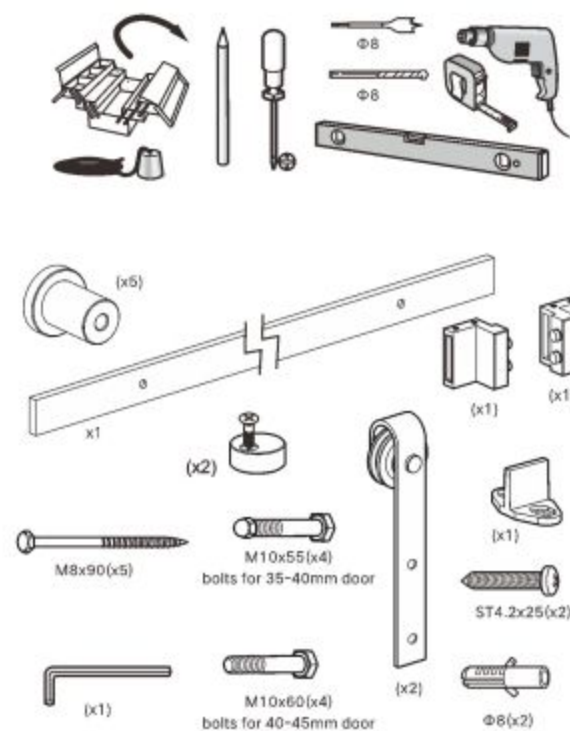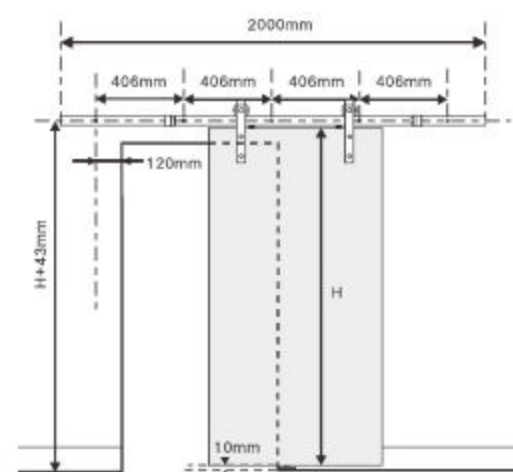

Installation steps 安装步骤

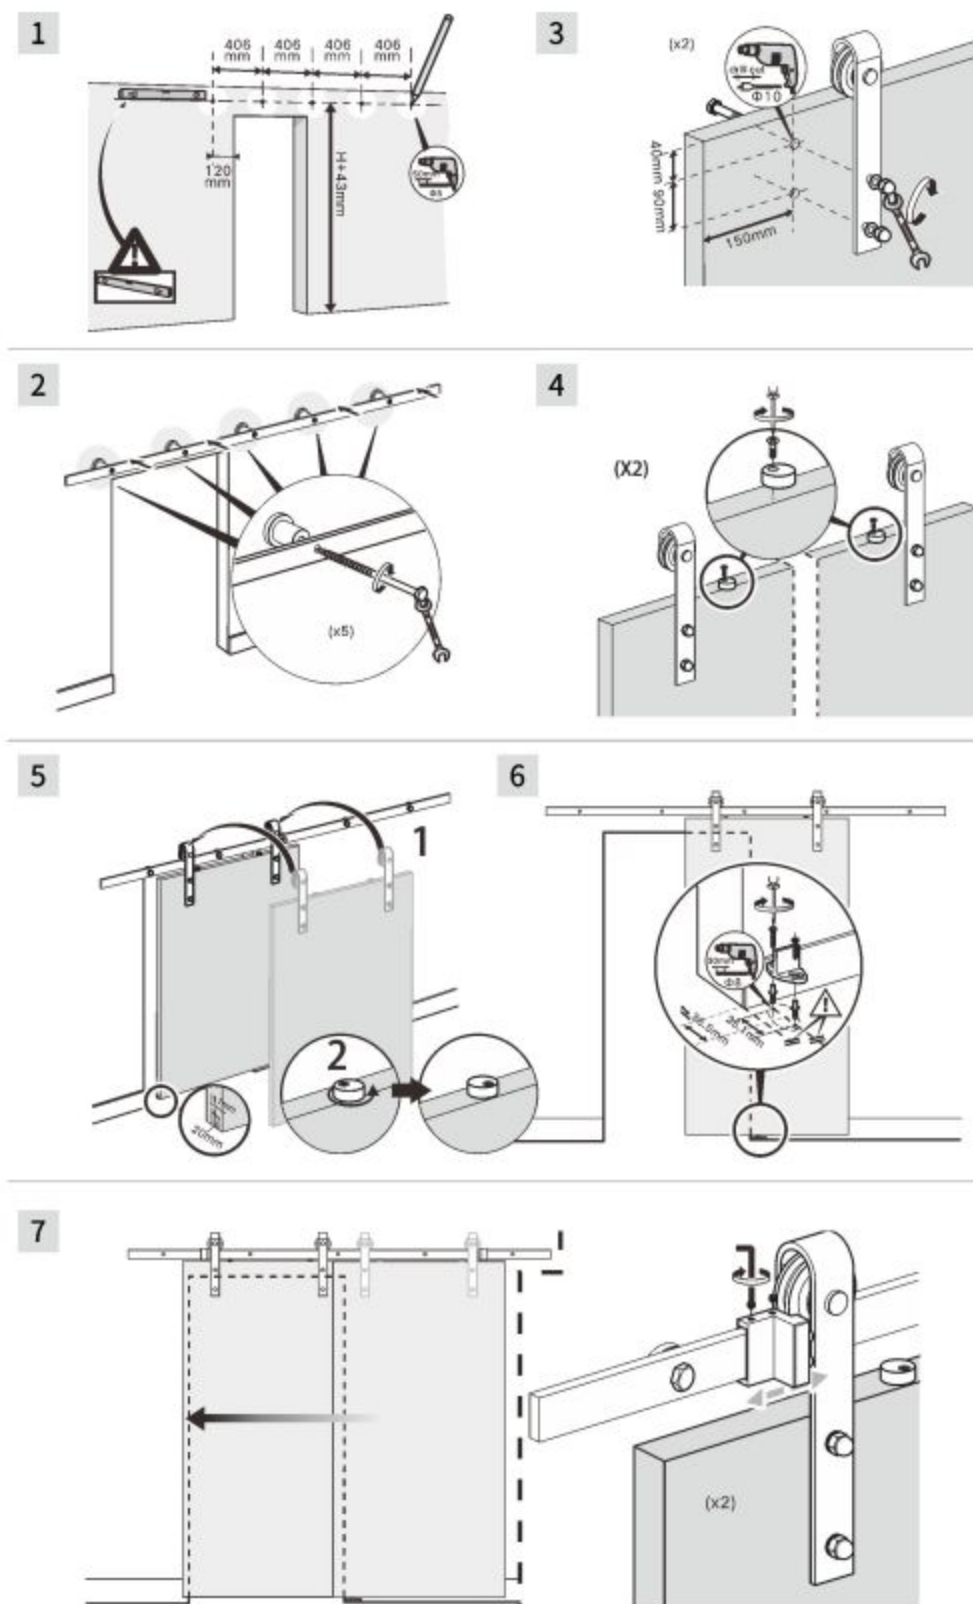





9765 谷仓门配件
9765 Barn door fittings




* 材质：不锈钢
* Material: Stainless steel

Product information 产品信息

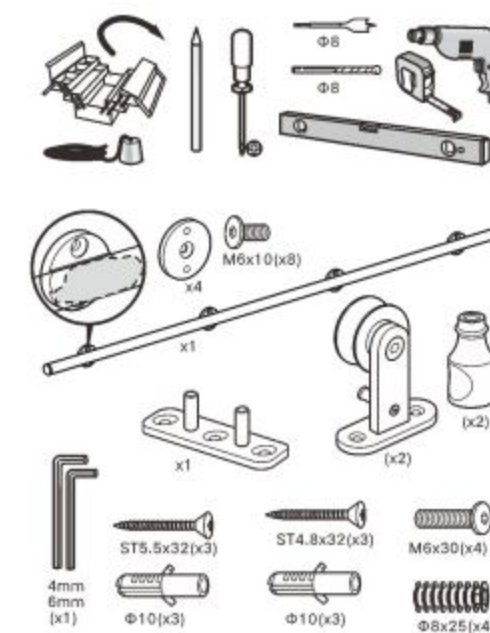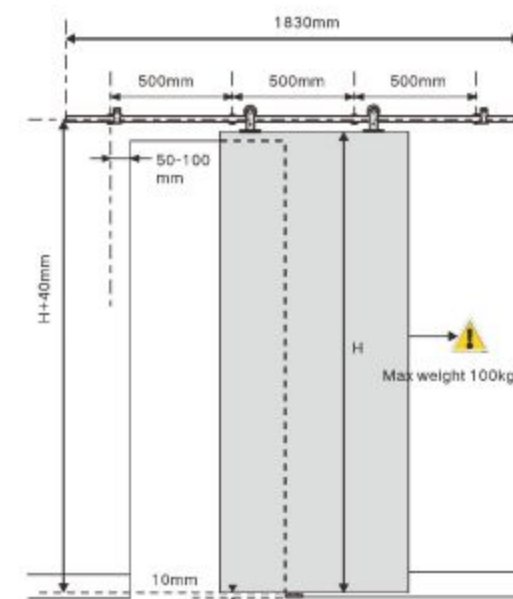



Installation steps 安装步骤

1

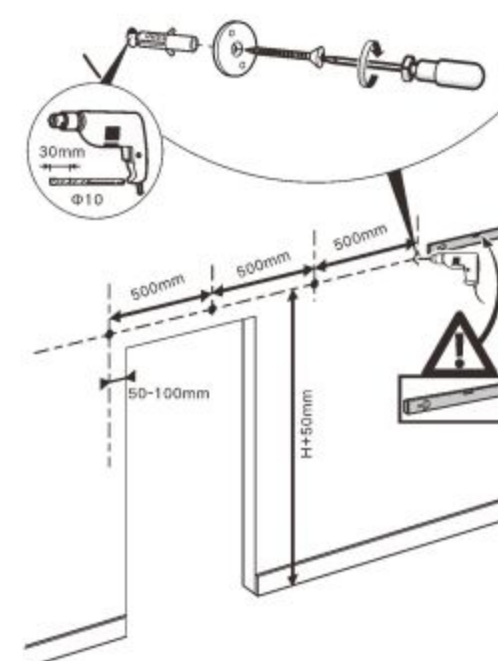

2

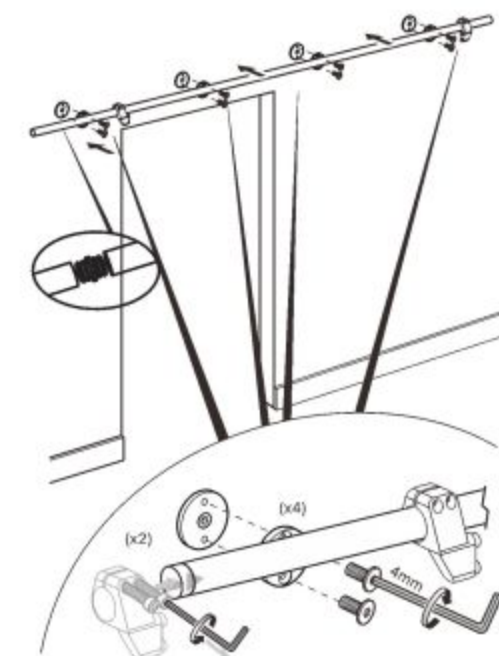

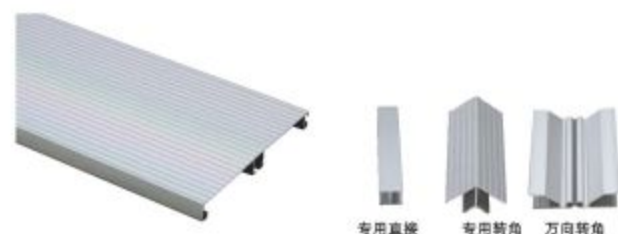

专用直接 专用转角 万向转角

FT7700踢脚线


- * 表面颜色: 波纹磨砂
- * Finish: wavy silver
- * 规格Size: H75 × L3600mm
- * 规格Size: H100 × L3600mm
- * 规格Size: H110 × L3600mm
- * 规格Size: H120 × L3600mm
- * 规格Size: H150 × L3600mm



专用直接 专用转角

FT7701踢脚线

- * 表面颜色: 平面拉丝
- * Finish: Brushed silver
- * 规格Size: H80 × L3600mm
- * 规格Size: H100 × L3600mm
- * 规格Size: H120 × L3600mm
- * 规格Size: H150 × L3600mm

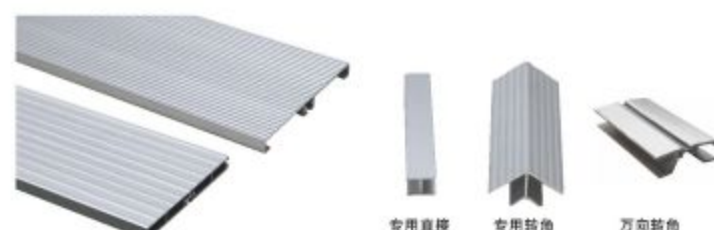

专用直接 专用转角 万向转角

FT7702踢脚线


- * 表面颜色: 波纹银灰
- * Finish: wavy silver
- * 规格Size: H80 × L3600mm
- * 规格Size: H95 × L3600mm
- * 规格Size: H99 × L3600mm
- * 规格Size: H110 × L3600mm
- * 规格Size: H150 × L3600mm
- * 规格Size: H110 × L3600mm(单层细纹)



专用直接 专用转角

FT7703踢脚线


- * 表面颜色: 平面铁灰拉丝
- * Finish: Brushed silver
- * 规格Size: H80 × L3000mm
- * 规格Size: H100 × L3000mm
- * 规格Size: H120 × L3000mm



7704

- * 材质: ABS
- * Material: ABS

- * 表面处理: 黑色
- * Finish: black



7705

- * 材质: ABS
- * Material: ABS

- * 表面处理: 黑色
- * Finish: black



7706


- * 材质: ABS
- * Material: ABS

- * 表面处理: 黑色
- * Finish: black

7707

- * 材质: ABS
- * Material: ABS

- * 表面处理: 黑色
- * Finish: black

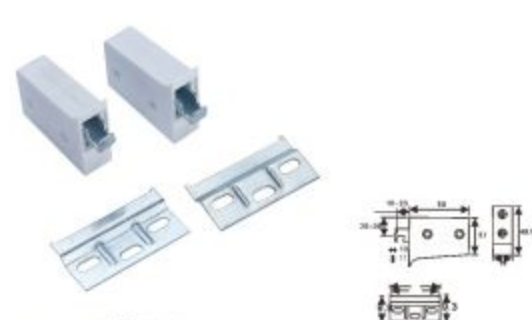

7745 明装吊码

* 材质: 塑料+铁
* Material: Plastic + iron

* 表面处理: 白色、米黄色
* Finish: White, beige

* 最大承重: 110kg
* Maximum load bearing: 110kg



7744 明装吊码




7746 明装吊码

* 材质: 塑料+锌合金
* Material: Plastic + zinc alloy

* 表面处理: 白色、灰色
* Finish: White, gray

* 最大承重: 130kg
* Maximum load bearing: 130kg

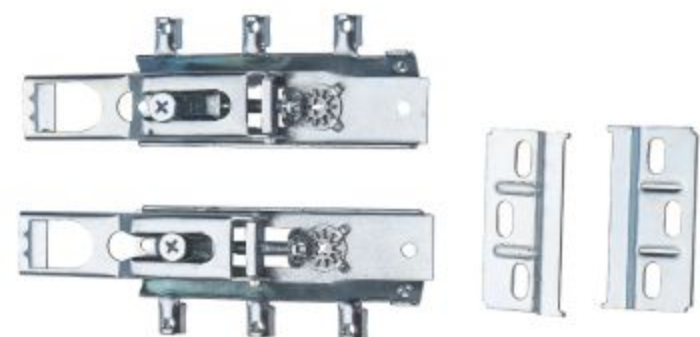

7747 隐藏吊码


* 材质: 铁
* Material: iron

* 表面处理: 镀锌
* Finish: galvanized

* 最大承重: 130kg
* Maximum load bearing: 130kg



7719

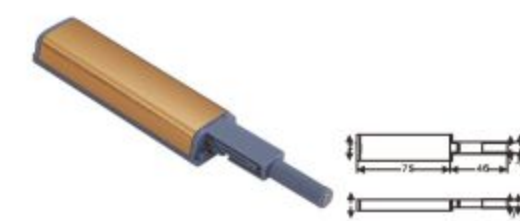

7720



7721



7722



7723



7724



7725




7726




7712

* 材质: 铁
* Material: steel
* 厚度: 1mm
* Thickness: 1mm

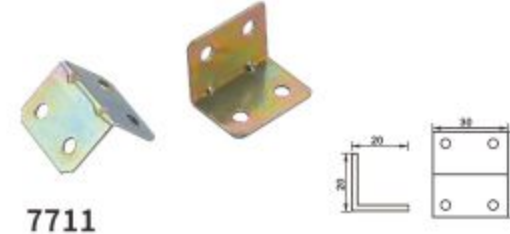

7711

* 材质: 铁
* Material: steel
* 厚度: 1mm
* Thickness: 1mm

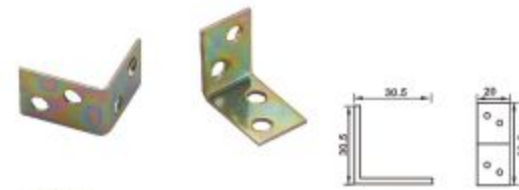


7709

* 材质: 铁
* Material: steel
* 厚度: 1-1.2mm
* Thickness: 1-1.2mm



7710

* 材质: 铁
* Material: steel
* 厚度: 0.8mm
* Thickness: 0.8mm

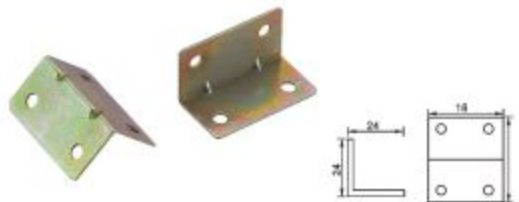

7713

* 材质: 铁
* Material: steel
* 厚度: 1mm
* Thickness: 1mm



7708

* 材质: 铁
* Material: steel
* 厚度: 2mm
* Thickness: 2mm




7716

* 材质: 铁
* Material: steel



7714

* 材质: 铁
* Material: steel

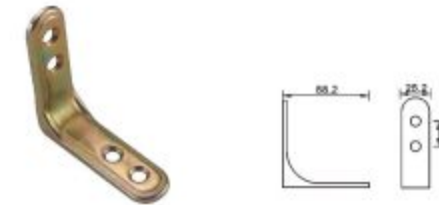

7715

* 材质: 铁
* Material: steel



7727

* 材质: 铁
* Material: steel



7717

* 材质: 铁
* Material: steel



7718

* 材质: 铁
* Material: steel





7727

* 材质：锌合金/铁 * Material: Zinc alloy/steel



7728

* 材质：锌合金/铁 * Material: Zinc alloy/steel



7735

* 材质：铁+塑料 * Material: steel+plastic



7736

* 材质：铁+塑料 * Material: steel+plastic



7729

* 材质：锌合金/铁 * Material: Zinc alloy/steel



7730

* 材质：铝型材 * Material: Zinc alloy/steel



7737

* 材质：铁+塑料 * Material: steel+plastic



7738

* 材质：铁+塑料 * Material: steel+plastic



7731

* 材质：锌合金/铁 * Material: Zinc alloy/steel



7732

* 材质：锌合金/铁 * Material: Zinc alloy/steel



7739

* 材质：铁+塑料 * Material: steel+plastic



7740

* 材质：铁+塑料 * Material: steel+plastic



7733

* 材质：铁+塑料 * Material: steel+plastic



7734

* 材质：铁+塑料 * Material: steel+plastic



7741

* 材质：铁+塑料 * Material: steel+plastic



7748

* 材质: 铝型材
* Material: Aluminium profile

* 厚度: 1.4mm
* Thickness: 1.4 mm



7749

* 材质: 铝型材
* Material: Aluminium profile

* 厚度: 1.2mm
* Thickness: 1.2 mm



7750

* 材质: 铝型材
* Material: Aluminium profile

* 厚度: 1.0mm
* Thickness: 1.0 mm



7751

* 材质: 铝型材
* Material: Aluminium profile

* 厚度: 1.8mm
* Thickness: 1.8 mm



7752

* 材质: 铝型材
* Material: Aluminium profile

* 厚度: 1.0mm
* Thickness: 1.0 mm



7753

* 材质: 铝型材
* Material: Aluminium profile

* 厚度: 1.8mm
* Thickness: 1.8 mm



7754

* 材质: 铝型材
* Material: Aluminium profile

* 厚度: 1.3mm
* Thickness: 1.3 mm



7755

* 材质: 铝型材
* Material: Aluminium profile

* 厚度: 1.3mm
* Thickness: 1.3 mm



7756

* 材质: 铝型材
* Material: Aluminium profile

* 厚度: 0.8mm
* Thickness: 0.8mm



7757

* 材质: 铝型材
* Material: Aluminium profile

* 厚度: 1.0mm
* Thickness: 1.0 mm



7758

* 材质: 铝型材
* Material: Aluminium profile

* 厚度: 0.6-1.2mm
* Thickness: 0.6-1.2mm



7759

* 材质: 铁/不锈钢
* Material: steel/stainless steel

* 厚度: 0.6-1.2mm
* Thickness: 0.6-1.2 mm



7760

* 材质: 铁
* Material: steel



7761

* 材质: 锌合金
* Material: Zinc alloy



7763

* 材质：锌合金+铁+塑料
* Material: Zinc alloy + iron + plastic

* 表面处理：银灰色
* Finish: silver

* 举力规格：30N、60N、100N、120N、150N
* Lift specifications: 30N, 60N, 100N, 120N, 150N



胶芯 Rubber core 铜芯 Copper core



标准上翻 Standard turn 任意上翻 Arbitrary turn over 缓冲上翻 buffer flip



可选规格 Optional specifications



可选颜色 Optional color



7762

* 材质：锌合金+铁+塑料
* Material: Zinc alloy + iron + plastic

* 表面处理：银灰色
* Finish: silver

* 举力规格：30N、60N、100N、120N、150N
* Lift specifications: 30N, 60N, 100N, 120N, 150N



气压支撑器配件
Air pressure support fittings

